צמוד תקרה לבן RING-S 30W 38CM 3CCT



סדרת צמודי תקרה בעיצוב יוקרתי ונוכחות מהפנטת עם שלושה גווני אור בגוף אחד לבחירה - חם, ניטרלי או קר. כיסוי אופטי חלבי המייצר אחידות אורית ומונע סנוור, מעניק תאורה נעימה המשתלבת בצורה מושלמת בעיצוב החלל. הגוף מספק שטף אורי גבוה, חסכוני בצריכת חשמל ובתחזוקה. כולל דרייבר ללא ריצוד איכותי ואמין. להארת חדרי מגורים, מבני ציבור, בתי מלון, מסעדות, אולמות אירועים ועוד.

מק"ט - 74062413
דגם - 5367-830RC
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

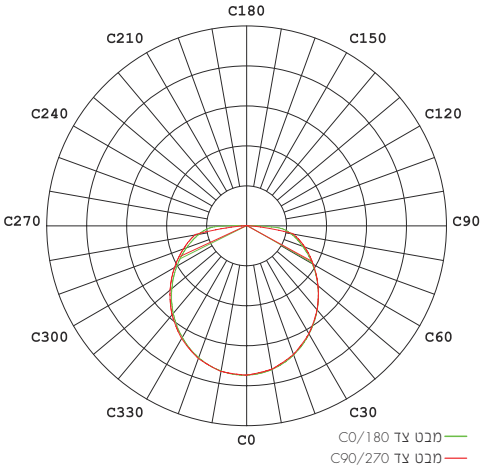

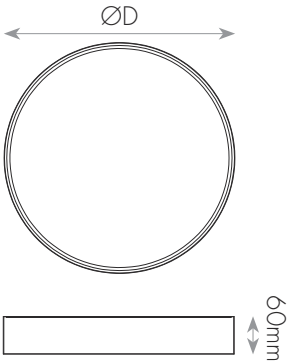



DIMENSIONS & WEIGHT	מידות ומשקל
Height	60mm
Diameter	380mm
Product weight	1500g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	milky
Cover material	PC

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	30W
Nominal current	0.14A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF030YA(H)750H
Driver output current	750mA
Power factor	>0.96
THDi	<20%
Output ripple current	≤0.5%
Inrush current	60A
Inrush current time T_{h50}	350µs
Max. no. of lum. On circuit break. B10 A	12
Max. no. of lum. On circuit break. B16 A	20
Max. no. of lum. On circuit break. C10 A	20
Max. no. of lum. On circuit break. C16 A	34
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900108
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900252 LF 17900258
Optional driver TRIAC	LF 17900034 LF 17900035

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20
Green Building	√ RoHS
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+50°C

PERFORMANCE ביצועים

Lifespan (Hr)	120000Hrs
Driver lifespan	120000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	80Lm/W
Luminous flux	2150/2400/2250Lm
CCT	3000/4000/6500K
CRI	>80
LED manufacturer	EPISTAR
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ