

# צמוד תקרה זהב JULIA 40W 40CM 3CCT

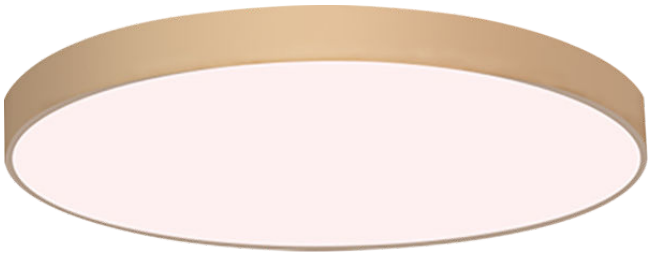


סדרת גופי תאורה צמודי תקרה דקורטיביים, בעיצוב מודרני ואלגנטי, המציעים שילוב מושלם של פונקציונליות ואסתטיקה. מאפשרים בחירה בין שלושה גווני אור – חם, ניטרלי או קר – להתאמה אישית לכל חלל וליצירת האווירה הרצויה. שטף אורי גבוה, דרייבר איכותי ללא ריצוד וכיסוי אופטי חלבי המבטיח פיזור אור אחיד ונעים, ללא סנוור, לתאורה נוחה ונעימה. חיסכון משמעותי בצריכת חשמל. להארת חדרי מגורים, מסעדות, בתי מלון, חללים מסחריים ועוד.

מק"ט - 74083420
דגם - A-MBMZH60H-R400 GOLD
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

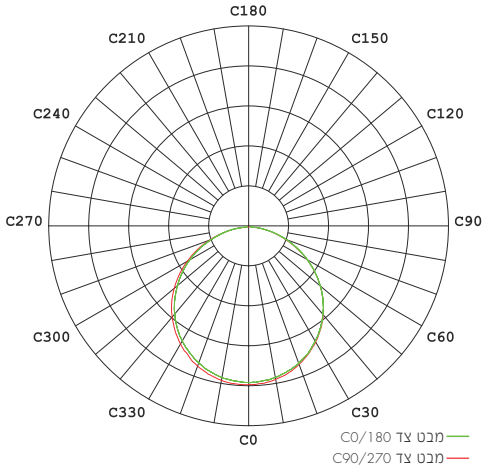




## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Height | 60mm |
| Diameter | 400mm |
| Product weight | 1450g |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | gold |
| Body material | aluminum |
| Cover finishing | milky |
| Cover material | PC |
| Lens material | PMMA |

NISKO

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 40W |
| Nominal current | 0.182A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | LIFUD |
| Driver model | LF-GIF040ES1050H |
| Driver output current | 1050mA |
| Power factor | >0.98 |
| THDi | <15% |
| Output ripple current | ≤5% |
| Inrush current | 30A |
| Inrush current time $T_{h50}$ | 150µs |
| Max. no. of lum. On circuit break. B10 A | 26 |
| Max. no. of lum. On circuit break. B16 A | 44 |
| Max. no. of lum. On circuit break. C10 A | 43 |
| Max. no. of lum. On circuit break. C16 A | 71 |
| Dimmable mode | ON/OFF dimmable optional |
| Optional driver ON/OFF | LF 17900112<br>LDV 10025040 |
| Optional driver 1-10V | LF 17900218 |
| Optional driver DALI | LF 17900254<br>LF 17900259 |
| Optional driver TRIAC | LF 17900034 |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP20 |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Surface |
| Mounting location | Ceiling<br>Wall |
| Type of protection | IP20 |
| Ambient temperature range | -10...+35°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 40000Hrs |
| Driver lifespan | 40000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 108Lm/W |
| Luminous flux | 4300(4K)Lm |
| CCT | 3000/4000/6000K |
| CRI | >80 |
| LED manufacturer | MLS |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ