

צמוד תקרה זהב JULIA 80W 80CM 3CCT

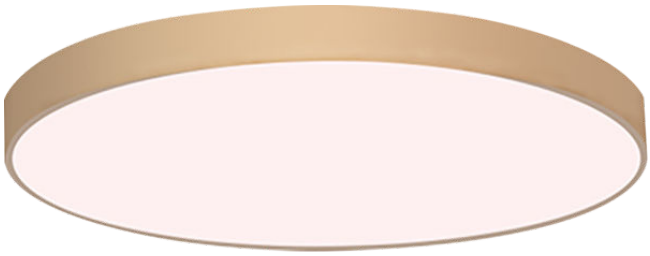


סדרת גופי תאורה צמודי תקרה דקורטיביים, בעיצוב מודרני ואלגנטי, המציעים שילוב מושלם של פונקציונליות ואסתטיקה. מאפשרים בחירה בין שלושה גווני אור – חם, ניטרלי או קר – להתאמה אישית לכל חלל וליצירת האווירה הרצויה. שטף אורי גבוה, דרייבר איכותי ללא ריצוד וכיסוי אופטי חלבי המבטיח פיזור אור אחיד ונעים, ללא סנוור, לתאורה נוחה ונעימה. חיסכון משמעותי בצריכת חשמל. להארת חדרי מגורים, מסעדות, בתי מלון, חללים מסחריים ועוד.

מק"ט - 74083422
דגם - A-MBMZH60H-R800 GOLD
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

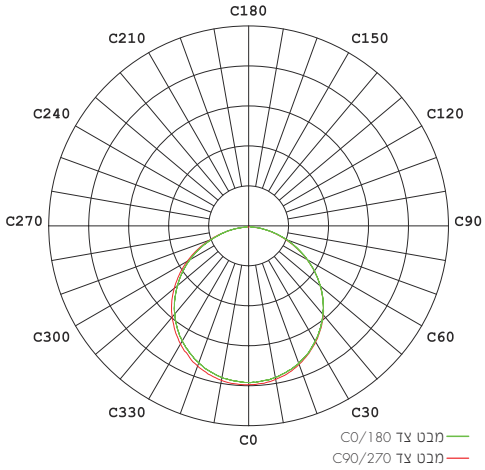





DIMENSIONS & WEIGHT — מידות ומשקל

Height	60mm
Diameter	800mm
Product weight	3700g

MATERIALS & COLORS — מבנה וגימור

Product color	gold
Body material	aluminum
Cover finishing	milky
Cover material	PC
Lens material	PMMA

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	80W
Nominal current	0.362A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	LIFUD
Driver model	2 × LF-GIF040ES1050H
Driver output current	2100mA
Power factor	>0.97
THDi	<15%
Output ripple current	≤5%
Inrush current	60A
Inrush current time T_{h50}	150µs
Max. no. of lum. On circuit break. B10 A	13
Max. no. of lum. On circuit break. B16 A	22
Max. no. of lum. On circuit break. C10 A	21
Max. no. of lum. On circuit break. C16 A	35
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900112 LDV 10025040
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900254 LF 17900259
Optional driver TRIAC	LF 17900034

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP20
Ambient temperature range	-10...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	40000Hrs
Driver lifespan	40000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	113Lm/W
Luminous flux	9050(4K)Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ