צמוד תקרה שחור MAYA UP-DOWN 96W 80CM 3CCT

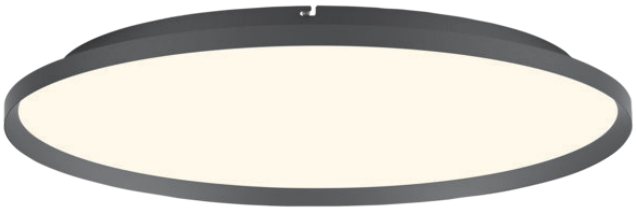

גופי תאורה דקורטיביים בעיצוב אלגנטי, המפיצים אור עליון/ תחתון/ משולב ליצירת אפקט מרשים ונעים. שליטה חכמה דרך מפסק חיצוני מאפשרת לבחור בין שלוש אפשרויות הדלקה, ובנוסף כפתור CCT מובנה מציע שלושה גווני אור: חם, ניטרלי או קר. כולל כיסוי אופטי חלבי המספק פיזור אחיד ללא סנוור, ודרייבר ללא ריצוד המבטיח תאורה יציבה וחסכונית. אידיאליים לחדרי מגורים, מסעדות, מלונות, אולמות וחללים מסחריים, ומשלבים בין עיצוב, נוחות ושליטה מלאה באור.

מק"ט - 74083475

דגם - A-MBMZH30D-F-R800 96W 80CM BLACK

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- 3 שנות אחריות



DIMENSIONS & WEIGHT

Height	30mm
Diameter	770mm
Product weight	6100g

MATERIALS & COLORS

Cable surface [mm2]	black
Protection class IEC 62262	aluminum
Cover material	milky
Lens material	PS

ELECTRICAL DATA

Nominal wattage	96W
Nominal current	0.48A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	2 × LF-GIF040ES0900H & LF-GIR024YS0600H
Driver output current	1500mA
Power factor	>0.84
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900106 LF 17900111 LDV 10025040
Optional driver 1-10V	LF 17900215 LF 17900218
Optional driver DALI	LF 17900252
Optional driver TRIAC	LF 17900034

CERTIFICATES & STANDARDS

Nisko Class	ECO 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP20

APPLICATION & MOUNTING

Ambient temperature range	-10...+35°C

PERFORMANCE

Lifespan (Hr)	100000Hrs

PHOTOMETRIC DATA

Luminous efficacy	100Lm/W
Luminous flux	9600Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Semi-Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >