צמוד תקרה לבן+עץ OREN 60W 60CM 3CCT





סדרת צמודי תקרה יוקרתיים המשלבים שלושה גווני אור לבחירה – חם, ניטרלי או קר, בגוף תאורה אחד. פתרון מושלם להתאמת האווירה לכל חלל ולעיצוב הפנים. כיסוי אופטי חלבי המבטיח פיזור אור אחיד, נעים, ומונע סנוור, לקבלת תאורה נעימה. כולל דרייבר איכותי ללא ריצוד, המבטיח שטף אורי גבוה וחסכוני בצריכת החשמל והתחזוקה. להארת חדרי מגורים, מבני ציבור, בתי מלון, מסעדות, אולמות אירועים ועוד.

מק"ט - 74083485
דגם - A-JJMZH120M-R600 WHITE+WOOD
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי



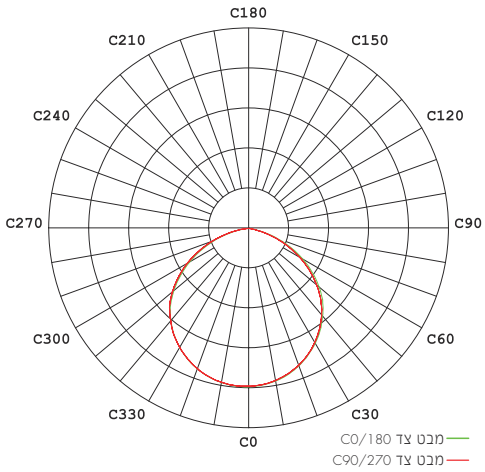

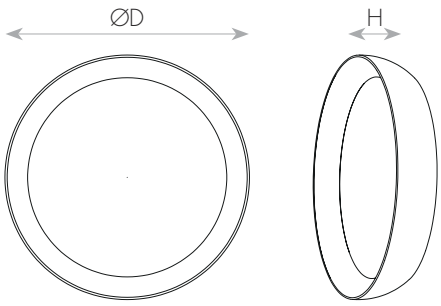

DIMENSIONS & WEIGHT — מידות ומשקל

Height	120mm
Diameter	600mm
Product weight	4000g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	milky
Cover material	PMMA
Lens material	PMMA

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	60W
Nominal current	0.27A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	2 × LF-GIF030ES0750H
Driver output current	1500mA
Power factor	>0.95
THDi	<15%
Output ripple current	≤5%
Inrush current	60A
Inrush current time T_{h50}	150µs
Max. no. of lum. On circuit break. B10 A	16
Max. no. of lum. On circuit break. B16 A	25
Max. no. of lum. On circuit break. C10 A	26
Max. no. of lum. On circuit break. C16 A	42
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900108
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900258 LF 17900259
Optional driver TRIAC	LF 17900034 LF 17900035

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	69Lm/W
Luminous flux	4150Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ