

# צמוד תקרה מרחף לבן GALAXY 75W 80CM 3CCT



סדרת צמודי תקרה דקורטיביים מרחפים, בעלי מסגרת דקה ואלגנטית. הגופים מייצרים עוצמה אורית גבוהה ומאפשרים בחירה בין שלושה גווני אור – חם, ניטרלי או קר, להתאמה אישית בכל חלל וליצירת האווירה הרצויה. הכיסוי האופטי החלבי מבטיח פיזור אור אחיד ונעים, ללא סנוור, להשגת תאורה נוחה ונעימה. חסכוניים בצריכת חשמל, ומצוידים בדרייבר איכותי ללא ריצוד. להארת חדרי מגורים, מסעדות, בתי מלון, חללים מסחריים ועוד.

מק"ט - 74094003
דגם - A-MBMZH11-R800 WHITE
קישור לדף מוצר ואביזרים נלווים באתר

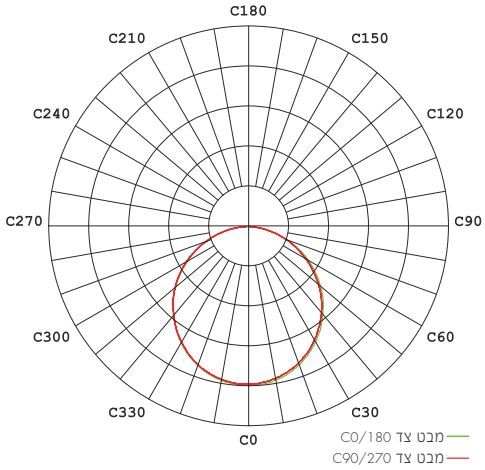

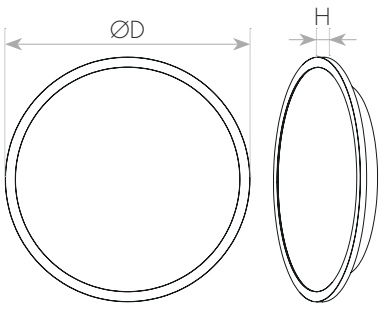


## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Height | 47mm |
| Diameter | 768mm |
| Product weight | 4700g |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | white |
| Body material | aluminum |
| Cover finishing | milky |
| Cover material | PS |
| Lens material | PMMA |

NISKO

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 75W |
| Nominal current | 0.33A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | LIFUD |
| Driver model | 2 × LF-GIF040ES0900H |
| Driver output current | 1800mA |
| Power factor | >0.96 |
| THDi | <15% |
| Output ripple current | ≤5% |
| Inrush current | 60A |
| Inrush current time $T_{h50}$ | 150µs |
| Max. no. of lum. On circuit break. B10 A | 13 |
| Max. no. of lum. On circuit break. B16 A | 21 |
| Max. no. of lum. On circuit break. C10 A | 22 |
| Max. no. of lum. On circuit break. C16 A | 35 |
| Dimmable mode | ON/OFF dimmable optional |
| Optional driver ON/OFF | LF 17900111<br>LDV 10025040 |
| Optional driver 1-10V | LF 17900215<br>LF 17900218 |
| Optional driver DALI | LF 17900258 |
| Optional driver TRIAC | LF 17900034 |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP20 |
| מחירון דקל | 88.082.1010 |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Surface |
| Mounting location | Wall |
| Type of protection | IP20 |
| Ambient temperature range | -10...+35°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 40000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 90Lm/W |
| Luminous flux | 6750Lm |
| CCT | 3000/4000/6000K |
| CRI | >80 |
| LED manufacturer | MLS |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ