צמוד תקרה לבן ROMEO 80W 80CM 3CCT




סדרת צמודי תקרה בעיצוב יוקרתי ונוכחות מרשימה. כיסוי אופטי חלבי המייצר אחידות אורית ומונע סנוור, מעניק תאורה נעימה המשתלבת בצורה מושלמת בעיצוב החלל. הגוף מספק שטף אורי גבוה, חסכוני בצריכת חשמל ובתחזוקה. כולל דרייבר ללא ריצוד איכותי ואמין. להתקנה בתלייה באמצעות אביזרים נלווים. להארת חדרי מגורים, מבני ציבור, בתי מלון, מסעדות, אולמות אירועים ועוד.


מק"ט - 74162632

דגם - 5361-880RCS-WH-CCT

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

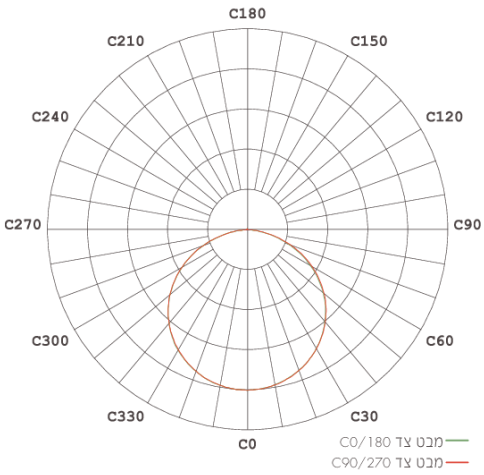

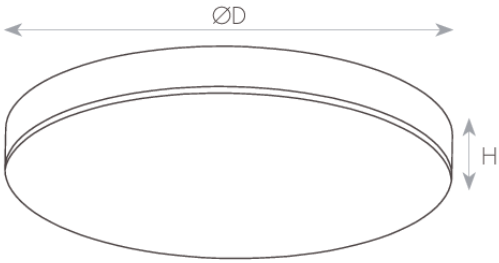



DIMENSIONS & WEIGHT

Height	60mm
Diameter	800mm
Product weight	6400g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	80W
Nominal current	0.37A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	EAGLERISE
Driver model	2 × LS-40-950 LI-HY
Driver output current	1900mA
Power factor	>0.98
THDi	<10%
Output ripple current	≤5%
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LDV 10025040
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900258 LF 17900259
Optional driver TRIAC	LF 17900034

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP20
מחירון דקל	88.082.1020

APPLICATION & MOUNTING

Ambient temperature range	-20...+35°C

PERFORMANCE

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA

Luminous efficacy	75/81/80Lm/W
Luminous flux	6000/6450/6400Lm
CCT	3000/4000/6500K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ