הצפה שחור SHARP PLUS 50W 90° IP66 אור ניטרלי



סדרת גופי תאורת הצפה ביעילות אורית גבוהה 110Lm/W ושטף אורי מיטבי. פיתרון עיצובי דק וחדשני הכולל זרוע מתכוונת של 270° במגוון הספקים. עשוי יציקת אלומיניום וכולל כיסוי פרוסט או זווית הארה ייחודית - 60/90° למיקוד האור ולהארה ברורה. להתקנה חיצונית בבתים, גינות, שטחים פתוחים, מרכזי קניות, חנויות, מפעלים ועוד.

מק"ט - 74605041
דגם - EVB-RD-50W 90d 4000K
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP66 | מתאים לדרישות התקן הישראלי

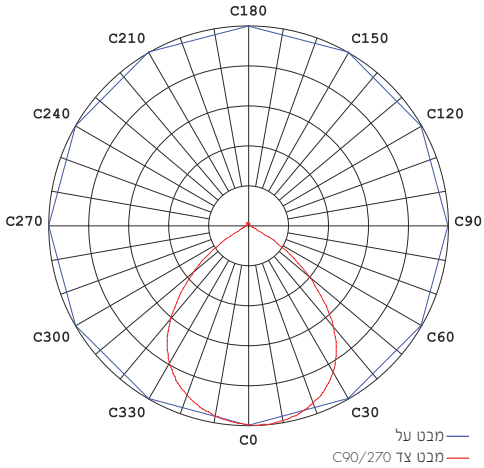

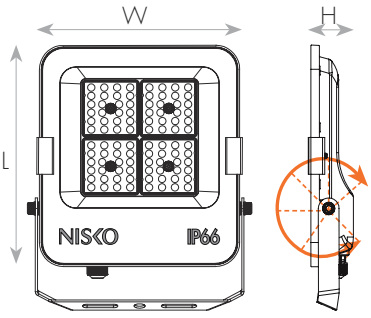



DIMENSIONS & WEIGHT — מידות ומשקל

Width	43.5mm
Length	213mm
Height	252mm
Product weight	800g

MATERIALS & COLORS — מבנה וגימור

Product color	black
Body material	aluminum
Cover finishing	Frosted
Cover material	glass
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	50W
Nominal current	0.25A
Nominal voltage	200-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.90
THDi	<16%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP66
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface Pole
Mounting location	Ceiling Wall Pole
Type of protection	IP66
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	110Lm/W
Luminous flux	5500Lm
CCT	4000K
CRI	>80
LED manufacturer	LUMILEDS
Chip type	SMD 2835
Beam angle	90°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >