
הצפה שחור 90° SHARP PLUS 200W
IP66 אור ניטרלי




סדרת גופי תאורת הצפה ביעילות אורית גבוהה 110Lm/W ושטף אורי מיטבי. פיתרון עיצובי דק וחדשני הכולל זרוע מתכוונת של 270° במגוון הספקים. עשוי יציקת אלומיניום וכולל כיסוי פרוסט או זווית הארה ייחודית - 60/90° למיקוד האור ולהארה ברורה. להתקנה חיצונית בבתים, גינות, שטחים פתוחים, מרכזי קניות, חנויות, מפעלים ועוד.

מק"ט - 74620041
דגם - EVB-RD-200W 90d 4000K
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP66 | מתאים לדרישות התקן הישראלי

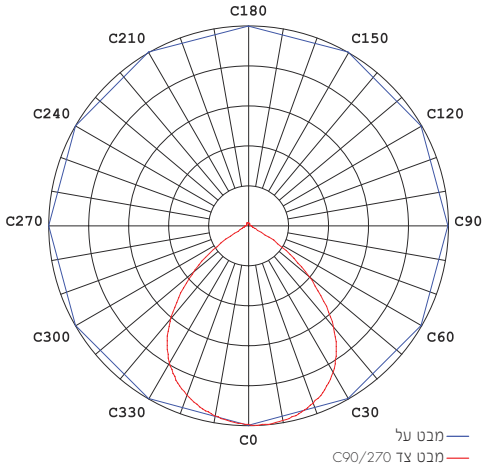

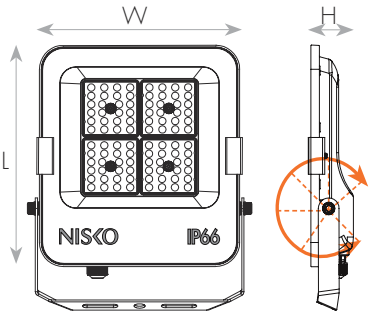

270° זרוע מתכוננת



DIMENSIONS & WEIGHT	מידות ומשקל
Width	54mm
Length	360mm
Height	412mm
Product weight	3500g

MATERIALS & COLORS	מבנה וגימור
Product color	black
Body material	aluminum
Cover finishing	Frosted
Cover material	glass
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	200W
Nominal current	0.94A
Nominal voltage	200-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.91
THDi	<17%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP66
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface Pole
Mounting location	Ceiling Wall Pole
Type of protection	IP66
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	110Lm/W
Luminous flux	22000Lm
CCT	4000K
CRI	>80
LED manufacturer	LUMILEDS
Chip type	SMD 2835
Beam angle	90°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >