הצפה שחור SHARP PLUS 400W IP66 אור קר



סדרת גופי תאורת הצפה ביעילות אורית גבוהה 110Lm/W ושטף אורי מיטבי. פיתרון עיצובי דק וחדשני הכולל זרוע מתכוונת של 270° במגוון הספקים. עשוי יציקת אלומיניום וכולל כיסוי פרוסט או זווית הארה ייחודית - 60/90° למיקוד האור ולהארה ברורה. להתקנה חיצונית בבתים, גינות, שטחים פתוחים, מרכזי קניות, חנויות, מפעלים ועוד.

מק"ט - 74640040

דגם - EVB-RD-400W-D0B milky 6000K

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP66
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

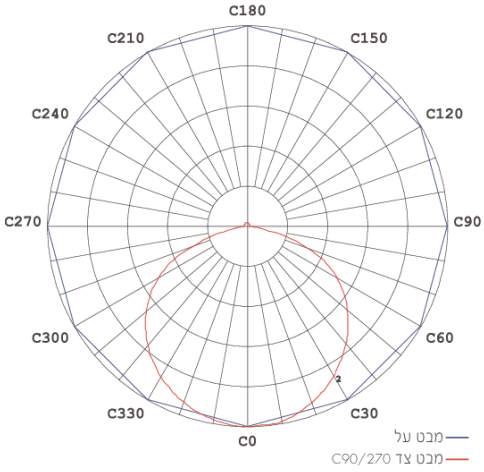

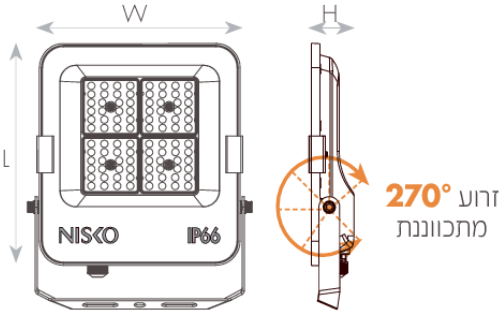



DIMENSIONS & WEIGHT

Width	58mm
Length	479mm
Height	498mm
Product weight	7000g

MATERIALS & COLORS

Cable surface [mm2]	black
Protection class IEC 62262	aluminum
Cover material	Frosted
Lens material	glass

ELECTRICAL DATA

Nominal wattage	400W
Nominal current	1.65A
Nominal voltage	200-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.98
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-5
CB	IEC 60598-1 IEC 60598-2-5 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP66
Green Building	ISO 14001
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Lifespan (Hr)	50000Hrs
Lifespan L70	>50000Hrs

PHOTOMETRIC DATA

Luminous efficacy	110Lm/W
Luminous flux	44000Lm
CCT	6000K
CRI	>80
LED manufacturer	LUMILEDS
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ