
צמוד תקרה צילינדר לבן חלבי LIA 15W IP44 אור חם




צילינדר בעיצוב נקי וקלאסי, בדרגת אטימות IP44. כיסוי אקרילי חלבי המייצר פיזור אור אחיד ומונע סנוור. משדרג את החלל עם תאורה נעימה ואיכותית. מקדם מסירת צבע גבוה במיוחד CRI >90 להארה טבעית ונכונה. כולל דרייבר חיצוני ללא ריצוד, להתקנה קלה ונוחה במגוון רחב של יישומים. להארה בבתי מגורים, גלריות, בתי מלון, שטחים מסחריים, מסעדות או מרפסות מקורות בלבד.

מק"ט - 75410320
דגם - D-15SMD4
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP44 | מתאים לדרישות התקן הישראלי

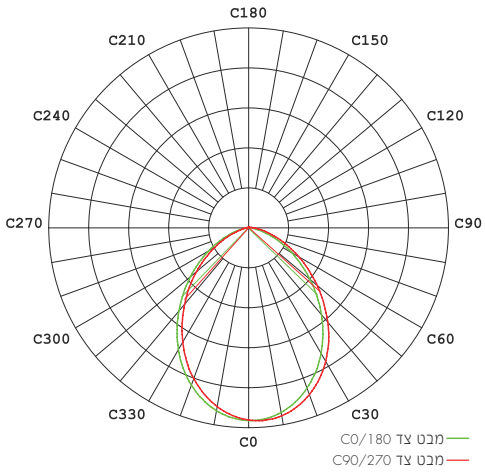





DIMENSIONS & WEIGHT	מידות ומשקל
Height	100mm
Diameter	130mm
Product weight	460g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	13W
Nominal current	0.64A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF022YF0350H
Driver output current	350mA
Power factor	>0.94
THDi	<20%
Output ripple current	≤0.5%
Inrush current	15A
Inrush current time T_{h50}	150µs
Max. no. of lum. On circuit break. B10 A	40
Max. no. of lum. On circuit break. B16 A	64
Max. no. of lum. On circuit break. C10 A	66
Max. no. of lum. On circuit break. C16 A	105
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900102
Optional driver 1-10V	LF 17900217
Optional driver DALI	LF 17900250 LF 17900251
Optional driver TRIAC	LF 17900033

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 62031 IEC 61347-1 IEC 61347-2-13
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP44
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP44
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	45000Hrs
Driver lifespan	45000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	92Lm/W
Luminous flux	1200Lm
CCT	3000K
CRI	>90
LED manufacturer	SAMSUNG
Chip type	SMD 2835
Beam angle	90°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין