
# צמוד תקרה צילינדר לבן חלבי LIA 25W IP44 אור חם




צילינדר בעיצוב נקי וקלאסי, בדרגת אטימות IP44. כיסוי אקרילי חלבי המייצר פיזור אור אחיד ומונע סנוור. משדרג את החלל עם תאורה נעימה ואיכותית. מקדם מסירת צבע גבוה במיוחד CRI >90 להארה טבעית ונכונה. כולל דרייבר חיצוני ללא ריצוד, להתקנה קלה ונוחה במגוון רחב של יישומים. להארה בבתי מגורים, גלריות, בתי מלון, שטחים מסחריים, מסעדות או מרפסות מקורות בלבד.

מק"ט - 75410321
דגם - D-15SMD6
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP44 | מתאים לדרישות התקן הישראלי

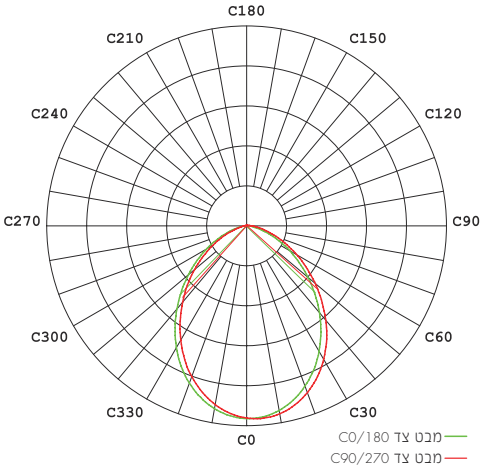




| DIMENSIONS & WEIGHT | מידות ומשקל |
|---|---|
| Height | 115mm |
| Diameter | 165mm |
| Product weight | 710g |

| MATERIALS & COLORS | מבנה וגימור |
|---|---|
| Product color | white |
| Body material | aluminum |
| Cover finishing | milky |
| Cover material | PC |

NISKO

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 23W |
| Nominal current | 1.07A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | LIFUD |
| Driver model | LF-GIF028YF0600H |
| Driver output current | 600mA |
| Power factor | >0.95 |
| THDi | <11% |
| Output ripple current | ≤0.5% |
| Inrush current | 37A |
| Inrush current time $T_{h50}$ | 166µs |
| Max. no. of lum. On circuit break. B10 A | 13 |
| Max. no. of lum. On circuit break. B16 A | 22 |
| Max. no. of lum. On circuit break. C10 A | 22 |
| Max. no. of lum. On circuit break. C16 A | 37 |
| Dimmable mode | ON/OFF dimmable optional |
| Optional driver ON/OFF | LF 17900105 |
| Optional driver 1-10V | LF 17900213<br>LF 17900218 |
| Optional driver DALI | LF 17900252 |
| Optional driver TRIAC | LF 17900035 |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 62031<br>IEC 61347-1<br>IEC 61347-2-13 |
| Photobiological Safety | IEC 62778 RG1 |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP44 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Surface |
| Mounting location | Ceiling |
| Type of protection | IP44 |
| Ambient temperature range | -20...+40°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 45000Hrs |
| Driver lifespan | 50000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 85Lm/W |
| Luminous flux | 1950Lm |
| CCT | 3000K |
| CRI | >90 |
| LED manufacturer | SAMSUNG |
| Chip type | SMD 2835 |
| Beam angle | 90° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין