צמוד תקרה צילינדר לבן ONYX 14W 3CCT

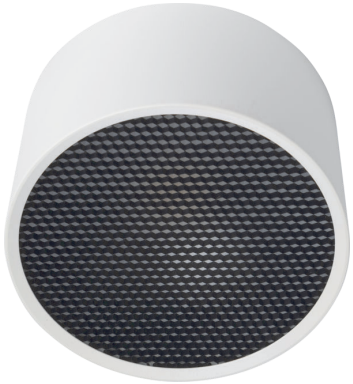

סדרת צילינדרים צמודי תקרה. מבנה אלומיניום איכותי בעיצוב נקי, איכות אורית גבוהה במיוחד CRI>90, שילוב של עדשת HONEYCOMB לפיזור עדין ורך או זכוכית חלבית איכותית להבטחת פיזור אור אחיד ולמניעת סנוור. הגוף מתאים להתקנה בבתי מגורים, גלריות, בתי מלון, שטחים מסחריים, מסעדות ועוד.

מק"ט - 75410403

דגם - UNI-ICSM-0025-14W 3CCT 80°/45° WHITE

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS1
- אייקון של 240-220 וולט 60-50 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

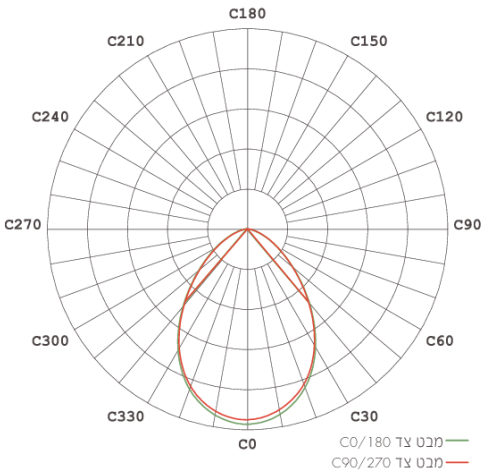





DIMENSIONS & WEIGHT

Height	64mm
Diameter	109mm
Product weight	330g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover material	Frosted
Lens material	glass

ELECTRICAL DATA

Nominal wattage	14W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.76
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP20
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-10...+40°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	79Lm/W
Luminous flux	1100(4K)Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	TYF
Chip type	SMD 3030
Beam angle	80°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >