# צמוד תקרה צילינדר לבן חלבי DARIA 24W 3CCT



צילינדר המאיר מעלה ומטה, ומציג טכנולוגיה מתקדמת, עיצוב חדשני, מוקפד ונקי. מיועד להדגשת קירות וליצירת אווירה אינטימית בחללים מגוונים. כולל דרייבר חיצוני ללא ריצוד, התקנה קלה ונוחה במגוון רחב של יישומים. מאפשר שילוב אסתטי ופונקציונלי בהתאמה לצרכים שונים. משתלב באופן מושלם בבתי מגורים, חללי עבודה, גלריות ובתי מלון.

מק"ט - 75410442

דגם - 386A-140-24W-C3 WHITE 3CCT

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP40
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

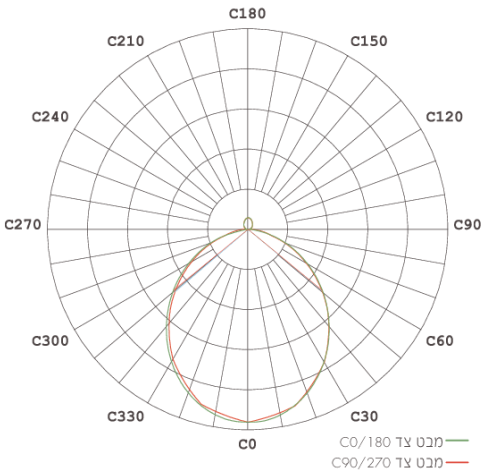




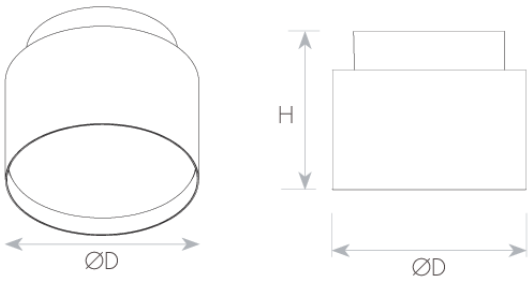

# DIMENSIONS & WEIGHT

| | |
|---|---|
| Height | 79mm |
| Diameter | 140mm |
| Product weight | 730g |

# MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | white |
| Protection class IEC 62262 | aluminum |
| Cover material | milky |
| Lens material | PC |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 24W |
| Nominal current | 0.1A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver output current | 600mA |
| Power factor | >0.96 |
| THDi | <16% |
| Output ripple current | ≤3% |
| Inrush current | 7.8A |
| Inrush current time $T_{h50}$ | 34.9µs |
| Dimmable mode | No |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=40°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | ✓ |
| TM21 | √ Ta=35°C |
| LM79 | ✓ |
| IP 60529 | IP40 |
| ISO 9001 | ✓ |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | -20...+40°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |
| TM21 | √ Ta=35°C |
| Lifespan L70 | >54000Hrs |
| Lifespan L80 | >54000Hrs |
| Lifespan L90 | >41000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 88Lm/W |
| Luminous flux | 2100/2100/2200Lm |
| CCT | 3000/4000/5700K |
| CRI | >90 |
| LED manufacturer | RUNLITE |
| Chip type | SMD 2835 |
| Beam angle | 100° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >