צמוד תקרה צילינדר שחור חלבי DARIA 24W 3CCT



צילינדר המאיר מעלה ומטה, ומציג טכנולוגיה מתקדמת, עיצוב חדשני, מוקפד ונקי. מיועד להדגשת קירות וליצירת אווירה אינטימית בחללים מגוונים. כולל דרייבר חיצוני ללא ריצוד, התקנה קלה ונוחה במגוון רחב של יישומים. מאפשר שילוב אסתטי ופונקציונלי בהתאמה לצרכים שונים. משתלב באופן מושלם בבתי מגורים, חללי עבודה, גלריות ובתי מלון.

מק"ט - 75410445

דגם - 386A-140-24W-C3 BLACK 3CCT

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP40
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

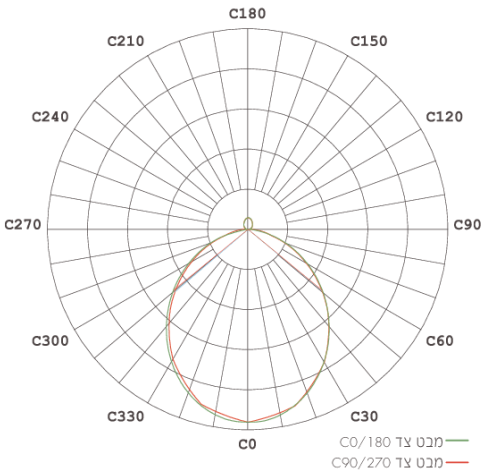

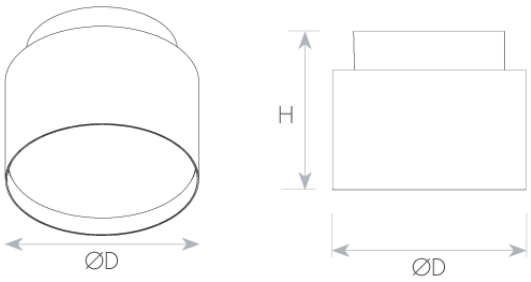

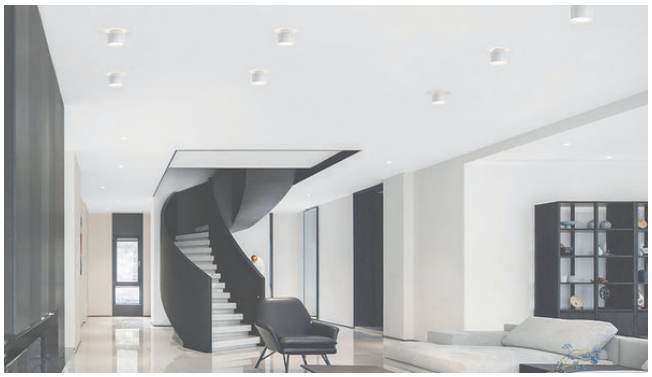

DIMENSIONS & WEIGHT

Height	79mm
Diameter	140mm
Product weight	730g

MATERIALS & COLORS

Cable surface [mm2]	black
Protection class IEC 62262	aluminum
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	24W
Nominal current	0.1A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	600mA
Power factor	>0.96
THDi	<16%
Output ripple current	≤3%
Inrush current	7.8A
Inrush current time T_{h50}	34.9µs
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP40
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-20...+40°C

PERFORMANCE

Lifespan (Hr)	30000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>41000Hrs

PHOTOMETRIC DATA

Luminous efficacy	88Lm/W
Luminous flux	2100/2100/2200Lm
CCT	3000/4000/5700K
CRI	>90
LED manufacturer	RUNLITE
Chip type	SMD 2835
Beam angle	100°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין