צמוד תקרה צילינדר שחור חלבי DARIA 24W 3CCT



צילינדר המאיר מעלה ומטה, ומציג טכנולוגיה מתקדמת, עיצוב חדשני, מוקפד ונקי. מיועד להדגשת קירות וליצירת אווירה אינטימית בחללים מגוונים. כולל דרייבר חיצוני ללא ריצוד, התקנה קלה ונוחה במגוון רחב של יישומים. מאפשר שילוב אסתטי ופונקציונלי בהתאמה לצרכים שונים. משתלב באופן מושלם בבתי מגורים, חללי עבודה, גלריות ובתי מלון.

מק"ט - 75410445
דגם - 386A-140-24W-C3 BLACK 3CCT
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

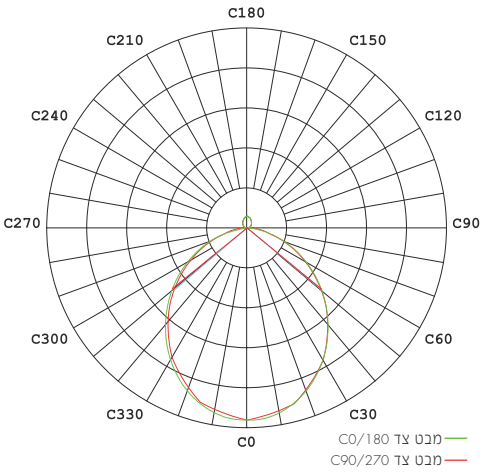

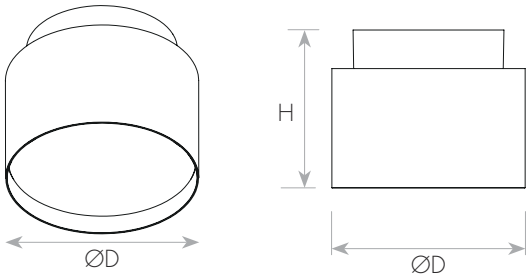

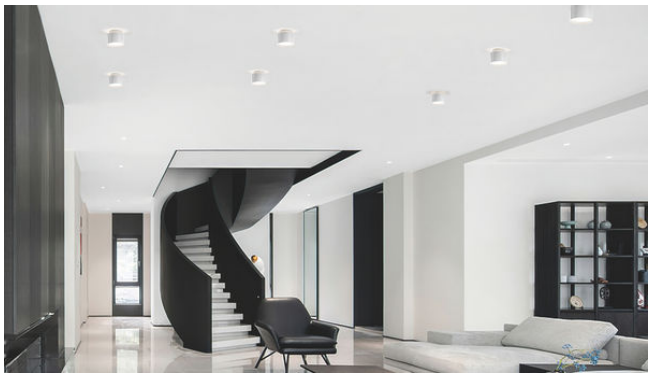

DIMENSIONS & WEIGHT	מידות ומשקל
Height	79mm
Diameter	140mm
Product weight	730g

MATERIALS & COLORS	מבנה וגימור
Product color	black
Body material	aluminum
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	24W
Nominal current	0.1A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	600mA
Power factor	>0.96
THDi	<16%
Output ripple current	≤3%
Inrush current	7.8A
Inrush current time T_{h50}	34.9µs
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP40
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>41000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	88Lm/W
Luminous flux	2100/2100/2200Lm
CCT	3000/4000/5700K
CRI	>90
LED manufacturer	RUNLITE
Chip type	SMD 2835
Beam angle	100°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין