
צמוד תקרה צילינדר לבן ARI 8W 3CCT




צילינדר מסדרת ARI בעיצוב מודרני המשלב אלגנטיות ופונקציונליות. כולל שלוש טבעות מתחלפות (3IN1) בגוון הגוף, בגימור עץ או זהב, בהתאמה אישית. כולל עדשה אופטית מתקדמת מפיקה אור רך, אחיד וללא סנוור, וכמו כן פעולה ללא ריצוד (Flicker-Free) לנוחות מרבית. אפשרות לבחירת גוון אור / 3000K / 4000K 6000K להתאמה מושלמת לכל חלל.

מק"ט - 75410450
דגם - 69508R LED 8W IP20 100D CRI90 3CCT WHITE+3RINGS
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

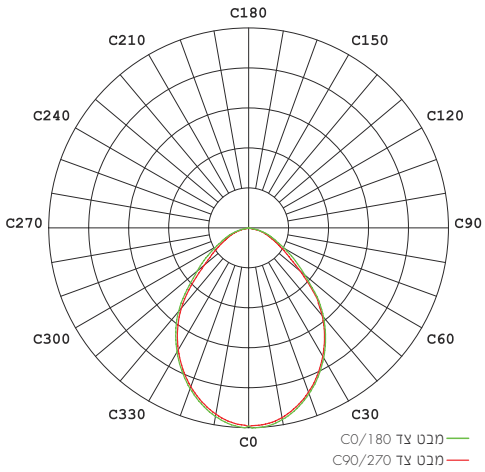

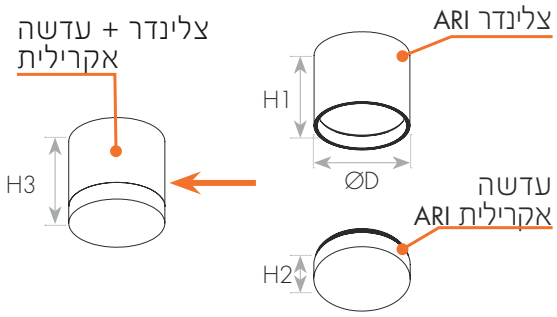



DIMENSIONS & WEIGHT	מידות ומשקל
Height	76mm
Diameter	90mm
Product weight	310g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	Prismatic

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	8.3W
Nominal current	0.06A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	LS-8-200 SX E
Driver output current	200mA
Power factor	>0.59
Output ripple current	≤5%
Inrush current	9.9A
Inrush current time T_{h50}	80µs
Max. no. of lum. On circuit break. B10 A	53
Max. no. of lum. On circuit break. B16 A	85
Max. no. of lum. On circuit break. C10 A	53
Max. no. of lum. On circuit break. C16 A	85
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900100
Optional driver 1-10V	LF 17900216
Optional driver DALI	LF 17900250
Optional driver TRIAC	LF 17900031 LF 17900032

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-10...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	77Lm/W
Luminous flux	750Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	BrightLED
Chip type	SMD 2835
Beam angle	100°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ