
צמוד תקרה צילינדר לבן ARI 12W 3CCT





צילינדר מסדרת ARI בעיצוב מודרני המשלב אלגנטיות ופונקציונליות. כולל שלוש טבעות מתחלפות (3IN1) בגוון הגוף, בגימור עץ או זהב, בהתאמה אישית. כולל עדשה אופטית מתקדמת מפיקה אור רך, אחיד וללא סנוור, וכמו כן פעולה ללא ריצוד (Flicker-Free) לנוחות מרבית. אפשרות לבחירת גוון אור / 3000K / 4000K 6000K להתאמה מושלמת לכל חלל.

מק"ט - 75410451
דגם - 69512R LED 12W IP20 100D CRI90 3CCT WHITE+3RINGS
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

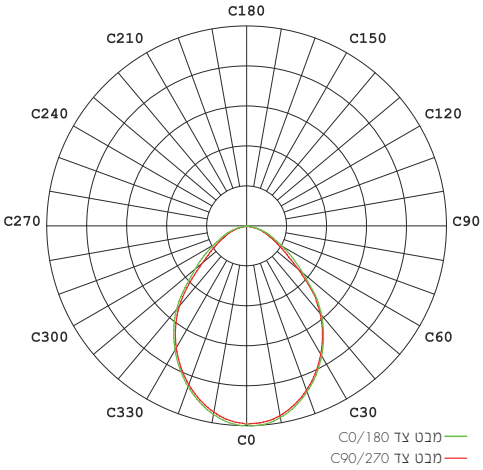

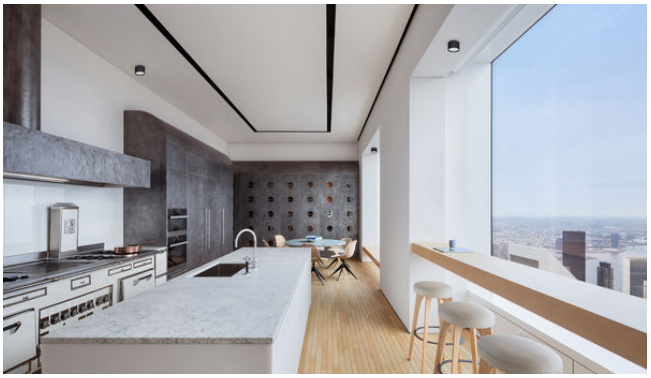

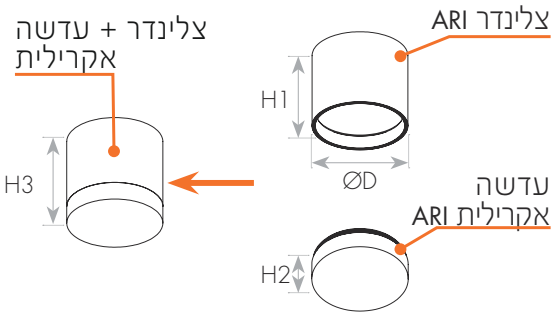

DIMENSIONS & WEIGHT	מידות ומשקל
Height	76mm
Diameter	110mm
Product weight	410g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	Prismatic

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	12W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	SS-12-300 SX E
Driver output current	300mA
Power factor	>0.56
Output ripple current	≤5%
Inrush current	14.8A
Inrush current time T_{h50}	72µs
Max. no. of lum. On circuit break. B10 A	26
Max. no. of lum. On circuit break. B16 A	42
Max. no. of lum. On circuit break. C10 A	26
Max. no. of lum. On circuit break. C16 A	42
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900101
Optional driver 1-10V	LF 17900216 LF 17900217
Optional driver DALI	LF 17900250 LF 17900251
Optional driver TRIAC	LF 17900033

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-10...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	79Lm/W
Luminous flux	950Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	BrightLED
Chip type	SMD 2835
Beam angle	100°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין