# צלינדר שחור FRESCO 14W אור חם




סדרת הצילינדרים המעוצבים של FRESCO. צמודי תקרה מאלומיניום איכותי, בעלי איכות אורית גבוהה CRI>90. עדשה מיוחדת להבטחת פיזור אור אחיד ולמניעת סנוור, בזווית פיזור של 60 מעלות. כולל FLICKER FREE. התקנה קלה ונוחה ללא צורך בפתיחת הגוף, וללא ברגים חיצוניים. אידיאלי להתקנה בבתי מגורים, גלריות, מלונות, חנויות, מסעדות ועוד.

מק"ט - 75410536

דגם - UNI-S-FR-14-B3

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

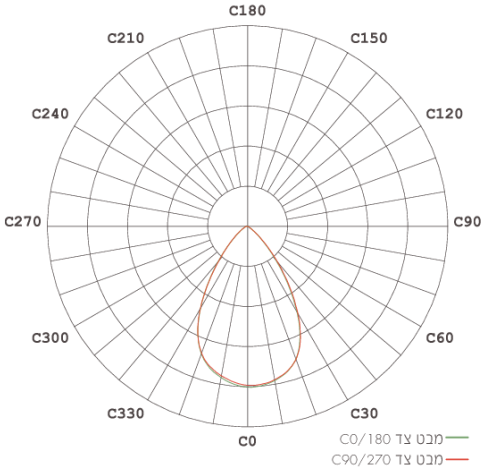







# DIMENSIONS & WEIGHT

| | |
|---|---|
| Height | 145mm |
| Diameter | 55mm |
| Product weight | 480g |

# MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | black |
| Protection class IEC 62262 | aluminum |
| Cover material | Prismatic |
| Lens material | PMMA |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 14W |
| Nominal current | 0.08A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | Integrated |
| Power factor | >0.72 |
| Dimmable mode | No |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 62031 |
| Photobiological Safety | IEC 62778 RG1<br>IEC 62778 RG0 (2m) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | ✓ |
| IP 60529 | IP20 |
| ISO 9001 | ✓ |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | 0...+35°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 69Lm/W |
| Luminous flux | 900Lm |
| CCT | 3000K |
| CRI | >90 |
| Chip type | COB |
| Beam angle | 60° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ