צלינדר לבן FRESCO 14W אור חם



סדרת הצילינדרים המעוצבים של FRESCO. צמודי תקרה מאלומיניום איכותי, בעלי איכות אורית גבוהה CRI>90. עדשה מיוחדת להבטחת פיזור אור אחיד ולמניעת סנוור, בזווית פיזור של 60 מעלות. כולל FLICKER FREE. התקנה קלה ונוחה ללא צורך בפתיחת הגוף, וללא ברגים חיצוניים. אידיאלי להתקנה בבתי מגורים, גלריות, מלונות, חנויות, מסעדות ועוד.

מק"ט - 75410537

דגם - UNI-S-FR-14-W3

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

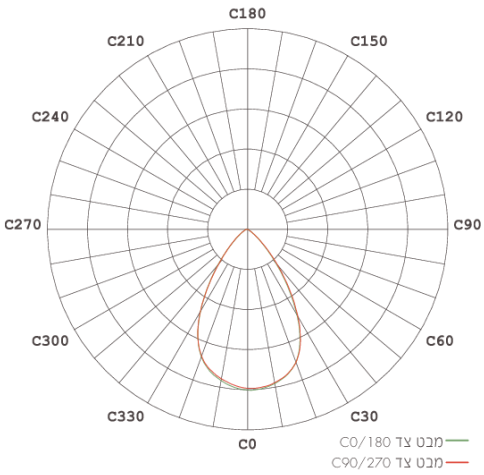





DIMENSIONS & WEIGHT

Height	145mm
Diameter	55mm
Product weight	480g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover material	Prismatic
Lens material	PMMA

ELECTRICAL DATA

Nominal wattage	14W
Nominal current	0.08A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.72
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 62031
Photobiological Safety	IEC 62778 RG1 IEC 62778 RG0 (2m)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP20
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	69Lm/W
Luminous flux	900Lm
CCT	3000K
CRI	>90
Chip type	COB
Beam angle	60°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > קבוצת ניסקו בע"מ > המעיין 41, מודיעין >