
שקוע תקרה שחור 36° 15W 12 GRADO
אור חם




סדרת שקועי תקרה GRADO בעיצוב יוקרתי במגוון הספקים ואורכים. כוללת יעילות אורית גבוהה, תאורה איכותית, מדויקת ונטולת סנוור. להארת בתי מגורים, גלריות, אירוח, מעברים ועוד.

מק"ט - 75410552
דגם - UNI-GRM-15B3
קישור לדף מוצר ואביזרים נלווים באתר

מתאים לדרישות התקן הישראלי | IK04 | IP40 | 100-240V 50-60Hz | VALUE | 3 YEAR GUARANTEE

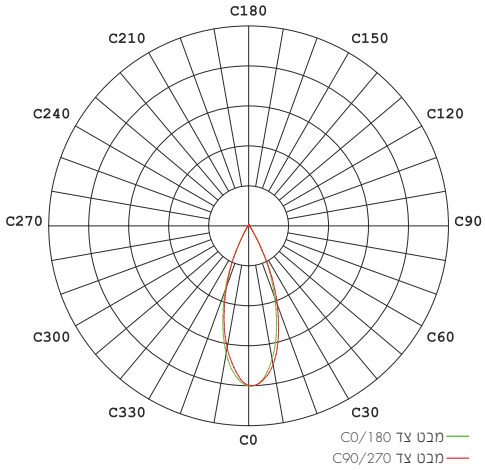

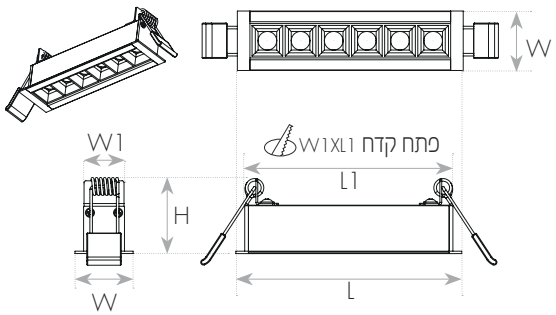



DIMENSIONS & WEIGHT	מידות ומשקל
Width	32.5mm
Length	230mm
Height	45mm
Cut hole width	23mm
Product weight	350g
Cut hole length	220mm

MATERIALS & COLORS	מבנה וגימור
Product color	black
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	Prismatic

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	15W
Nominal current	0.07A
Nominal voltage	100-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver output current	240mA
Power factor	>0.90
Output ripple current	≤2%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CE	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	90Lm/W
Luminous flux	1350Lm
CCT	3000K
CRI	>90
LED manufacturer	LUMILEDS
Chip type	SMD 3030
Beam angle	36°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >