
# מנורת תלייה לבן LINE 3W 60CM אור חם




מנורת תלייה דקורטיבית מסדרת LINE בעיצוב מודרני. מיוצרת מחומרים איכותיים, מגוון צבעים ואורכים ורמת גימור גבוהה. איכות אורית גבוהה - CRI>90. ייעודית לבתי מגורים, לובאים, אולמות אירועים, בתי מלון ועוד.

מק"ט - 75410609
דגם - UNI-C-515-600-W-3K
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

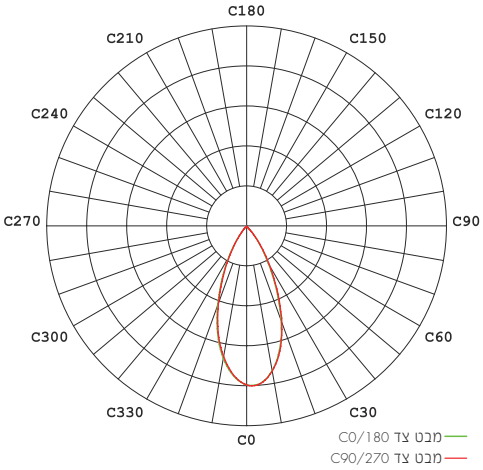

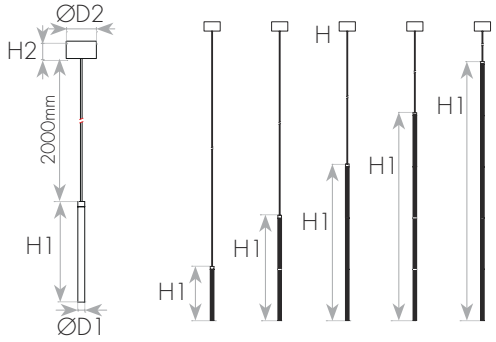


| DIMENSIONS & WEIGHT | מידות ומשקל |
|---|---|
| Length | 672mm |
| Diameter | 16mm |
| Product weight | 340g |
| Cable length | 2 |

| MATERIALS & COLORS | מבנה וגימור |
|---|---|
| Product color | white |
| Body material | aluminum |
| Cover finishing | Prismatic |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 3W |
| Nominal current | 0.02A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | EAGLERISE |
| Driver model | LS-3-700 SB |
| Driver output current | 700mA |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | ECO 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP20 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Suspension |
| Mounting location | Ceiling |
| Type of protection | IP20 |
| Ambient temperature range | 0...+35°C |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 50Lm/W |
| Luminous flux | 150Lm |
| CCT | 3000K |
| CRI | >90 |
| LED manufacturer | CREE |
| Chip type | SMD 3535 |
| Beam angle | 45° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ