
מנורת תלייה לבן SEGNO UP&DOWN 3X5W אור חם



מנורת תלייה דקורטיבית מסדרת SEGNO 3X5W בעיצוב מודרני. הארה בשני כיוונים - כלפי מעלה ומטה. מיוצרת מחומרים איכותיים וברמת גימור גבוהה. איכות אורית גבוהה - CRI>90, זווית הארה 33° וכיסוי אופטי שקוף. ייעודית לבתי מגורים, לובאים, אולמות אירועים, בתי מלון ועוד.

מק"ט - 75410626
דגם - UNI-ICBM-20-UD-W-3K
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

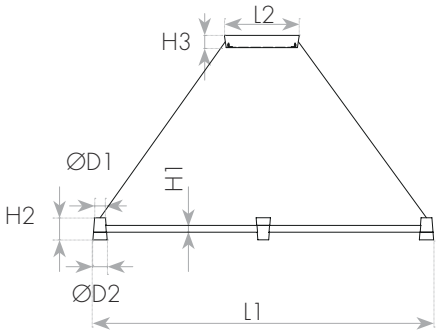



DIMENSIONS & WEIGHT	מידות ומשקל
Length	1003mm
Product weight	780g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	Clear

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	3X5W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	LS-20-400 LI EXC
Driver output current	400mA
Power factor	>0.95
THDi	<20%
Output ripple current	≤5%
Inrush current	11.9A
Inrush current time T_{h50}	134µs
Max. no. of lum. On circuit break. B10 A	50
Max. no. of lum. On circuit break. B16 A	80
Max. no. of lum. On circuit break. C10 A	50
Max. no. of lum. On circuit break. C16 A	80
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Suspension
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	100000Hrs
Driver lifespan	100000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	87Lm/W
Luminous flux	1300Lm
CCT	3000K
CRI	>90
LED manufacturer	OSRAM
Chip type	SMD 2835
Beam angle	33°
CIE class	Semi-Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >