מנורת תלייה צמודת תקרה שחור וכסף
SPIKO C1 6W אור חם




מנורת תלייה דקורטיבית מסדרת SPIKO. המנורה צמודת תקרה ובעלת איכות אורית גבוהה CRI>90, כיסוי אופטי של עדשת HONEYCOMB, עיצוב מודרני ומרהיב במגוון אורכים. מיוצרת מחומרים איכותיים וברמת גימור גבוהה. להארה בבתי מגורים, לובאים, אולמות אירועים, בתי מלון ועוד.

מק"ט - 75410633


דגם - UNI-ICSM-013-C1-B-3K

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS1
- אייקון של 240-220 וולט 60-50 הרץ
- 3 שנות אחריות

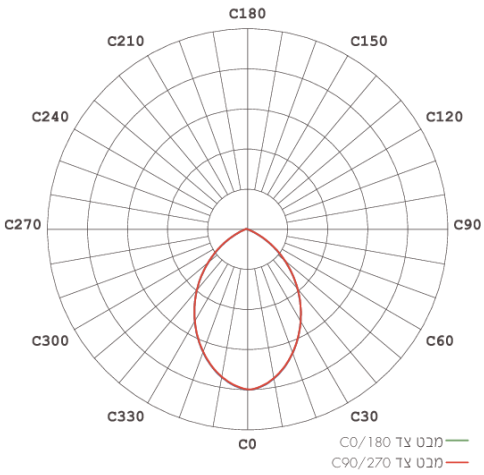



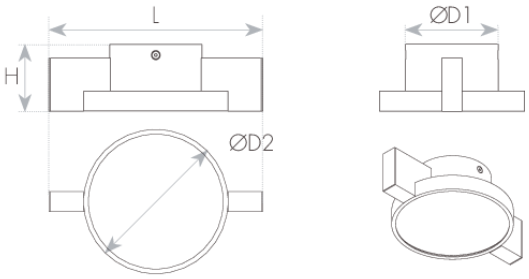

DIMENSIONS & WEIGHT

Width	69mm
Length	160mm
Height	50mm
Diameter	108mm
Product weight	420g
Cable length	1.5

MATERIALS & COLORS

Cable surface [mm2]	Black SIlver
Protection class IEC 62262	aluminum
Cover material	milky

ELECTRICAL DATA

Nominal wattage	6W
Nominal current	0.03A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	LS-8-220 LI EXC
Driver output current	220mA
Power factor	>0.95
THDi	<20%
Output ripple current	≤5%
Inrush current	2.44A
Inrush current time T_{h50}	38µs
Max. no. of lum. On circuit break. B10 A	114
Max. no. of lum. On circuit break. B16 A	182
Max. no. of lum. On circuit break. C10 A	114
Max. no. of lum. On circuit break. C16 A	182
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	ECO 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Lifespan (Hr)	100000Hrs
Driver lifespan	100000Hrs

PHOTOMETRIC DATA

Luminous efficacy	50Lm/W
Luminous flux	300Lm
CCT	3000K
CRI	>90
LED manufacturer	OSRAM
Chip type	SMD 2835
Beam angle	80°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >