צמוד קיר שחור SYLVANIA UP&DOWN
18W IP65 אור חם




צמודי קיר UP&DOWN בעיצוב אלגנטי לתאורת חוץ תוצרת SYLVANIA העולמית. הארה מיטבית בשני כיוונים - כלפי מעלה וכלפי מטה. חוזק מכני IK08 ודרגת אטימות IP65. יעילות אורית גבוהה, להבטחת חיסכון בצריכת חשמל. להארת היקפי מבנה, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.


מק"ט - 75512003

דגם - ZB703FSD

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

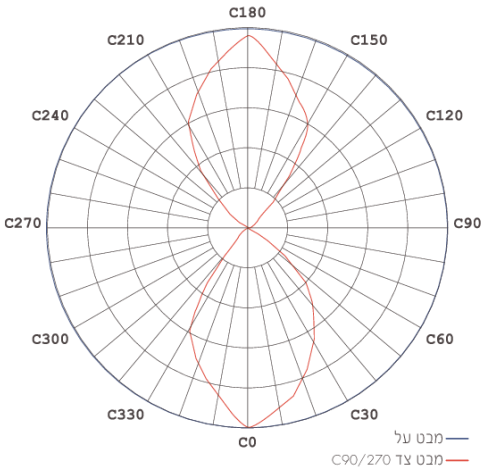

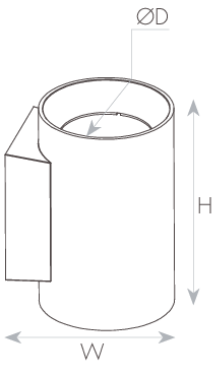



DIMENSIONS & WEIGHT

Width	131mm
Height	175mm
Diameter	110mm
Product weight	1800g

MATERIALS & COLORS

Cable surface [mm2]	black
Protection class IEC 62262	aluminum
Cover finishing	IK08
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	18W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	EBP018C0450CHP
Driver output current	450mA
Power factor	>0.90
Inrush current	10A
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-30...+35°C

PERFORMANCE

Lifespan (Hr)	43800Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>54000Hrs
Driver lifespan	43800Hrs

PHOTOMETRIC DATA

Luminous efficacy	75Lm/W
Luminous flux	1350Lm
CCT	3000K
CRI	>80
LED manufacturer	CREE
Chip type	COB
Beam angle	80°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ