
צמוד קיר לבן SYLVANIA UP&DOWN 38W IP65 אור חם




צמודי קיר לד UP&DOWN בעיצוב אלגנטי לתאורת חוץ תוצרת SYLVANIA העולמית. הארה מיטבית בשני כיוונים - כלפי מעלה וכלפי מטה. חוזק מכני IK08 ודרגת אטימות IP65. יעילות אורית גבוהה, להבטחת חיסכון בצריכת חשמל. להארת היקפי מבנה, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 75514013
דגם - ZB703FMD
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

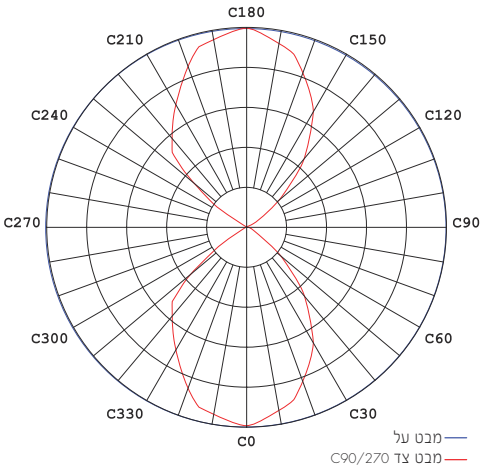



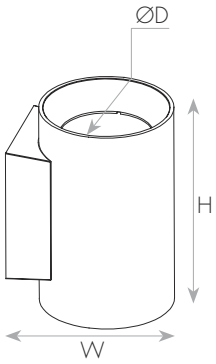

DIMENSIONS & WEIGHT	מידות ומשקל
Width	168mm
Height	226mm
Diameter	144mm
Product weight	2950g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PC

NISKO

SYLVANIA

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	38W
Nominal current	0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	GALOPPATO
Driver model	GLP40WR1A-P
Driver output current	1000mA
Power factor	>0.91
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-30...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	54000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>60000Hrs

NISKO

SYLVANIA

PHOTOMETRIC DATA	אופטיקה
Luminous efficacy	88Lm/W
Luminous flux	3350Lm
CCT	3000K
CRI	>80
LED manufacturer	CREE
Chip type	COB
Beam angle	82°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >