בולרד שחור SYLVANIA 25W 800mm IP65 אור ניטרלי



בולרד דקורטיבי מבית SYLVANIA העולמית. חוזק מכני IK08 ודרגת אטימות IP65. להארת שטחים פתוחים: שבילים, גינות, גנים ציבוריים, מבואות מבנים, טיילות ועוד.

מק"ט - 75525408

דגם - ZT714F-H80

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

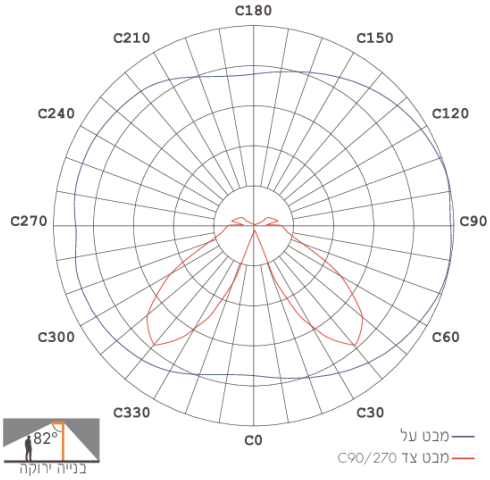





DIMENSIONS & WEIGHT

Height	800mm
Diameter	168mm
Product weight	4400g

MATERIALS & COLORS

Cable surface [mm2]	black
Protection class IEC 62262	aluminum
Cover finishing	IK08
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	25W
Nominal current	0.12A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	EAGLERISE
Driver model	EBP025C1200CHP
Driver output current	1200mA
Power factor	>0.93
Inrush current	10A
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-30...+45°C

PERFORMANCE

Lifespan (Hr)	30000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>54000Hrs
Driver lifespan	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	76Lm/W
Luminous flux	1900Lm
CCT	4000K
CRI	>80
LED manufacturer	Lextar
Chip type	SMD 2835
Beam angle	310°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין