# בולרד שחור SYLVANIA 25W 1000mm IP65 אור ניטרלי



בולרד דקורטיבי מבית SYLVANIA העולמית. חוזק מכני IK08 ודרגת אטימות IP65.
להארת שטחים פתוחים: שבילים, גינות, גנים ציבוריים, מבואות מבנים, טיילות ועוד.

מק"ט - 75525410
דגם - ZT714F-H100
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

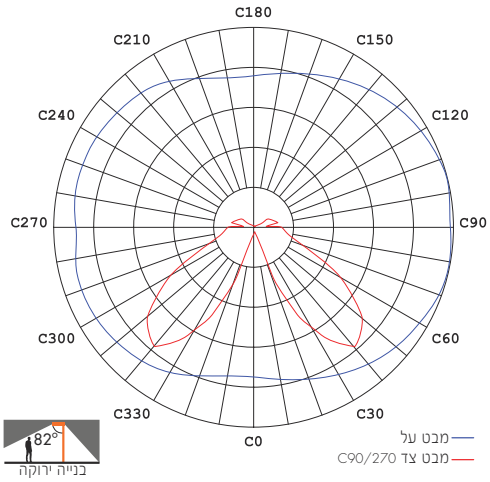







## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Height | 1000mm |
| Diameter | 168mm |
| Product weight | 5300g |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | black |
| Body material | aluminum |
| Protection class IEC 62262 | IK08 |
| Cover finishing | Clear |
| Cover material | PC |

NISKO

SYLVANIA

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 25W |
| Nominal current | 0.12A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | EAGLERISE |
| Driver model | EBP025C1200CHP |
| Driver output current | 1200mA |
| Power factor | >0.93 |
| Inrush current | 10A |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | PROFESSIONAL 5 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CB | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| TM21 | √ Ta=35°C |
| LM79 | √ |
| IP 60529 | IP65 |
| Protection class IK 62262 (shock resistance) | IK08 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Outdoor |
| Mounting type | External |
| Mounting location | Ground |
| Type of protection | IP65 |
| Ambient temperature range | -30...+45°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |
| TM21 | √ Ta=35°C |
| Lifespan L70 | >54000Hrs |
| Lifespan L80 | >54000Hrs |
| Lifespan L90 | >54000Hrs |
| Driver lifespan | 30000Hrs |

NISKO

SYLVANIA

| PHOTOMETRIC DATA | אופטיקה |
|---|---|
| Luminous efficacy | 76Lm/W |
| Luminous flux | 1900Lm |
| CCT | 4000K |
| CRI | >80 |
| LED manufacturer | Lextar |
| Chip type | SMD 2835 |
| Beam angle | 310° |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >