
# צמוד קיר שחור מט ROUND 8W IP65 3CCT

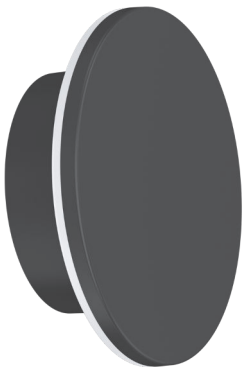


תאורת הילה דקורטיבית מיציקת אלומיניום בגימור שחור מט. צמודי הקיר בדרגת אטימות גבוהה IP65. חסכוניים במיוחד, התקנה קלה ונוחה. להארה ייחודית של היקפי מבנה, משטחים אנכיים, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 76000060

דגם - WL105-8W-P3

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK06
- IP65
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

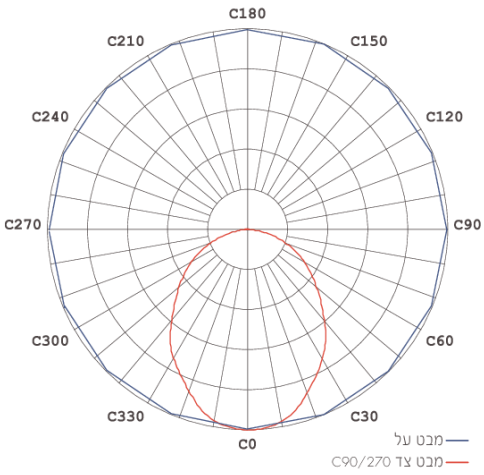




# DIMENSIONS & WEIGHT

| | |
|---|---|
| Height | 50mm |
| Diameter | 160mm |
| Product weight | 500g |

# MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | Black Matt RAL 9005 |
| Protection class IEC 62262 | aluminum |
| Cover finishing | IK06 |
| Cover material | Frosted |
| Lens material | PC |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 8W |
| Nominal current | 0.04A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver output current | 95mA |
| Power factor | >0.91 |
| THDi | <28% |
| Output ripple current | ≤0.2% |
| Dimmable mode | No |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | PROFESSIONAL 5 Years |
| Israeli Standard | Ta=45°C<br>IS 20-1<br>IS 20-2-1 |
| CB | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | ✓ |
| TM21 | √ Ta=35°C |
| LM79 | ✓ |
| IP 60529 | IP65 |
| Protection class IK 62262 (shock resistance) | IK06 |
| Green Building | ✓ |
| ISO 9001 | ✓ |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | -20...+40°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 50000Hrs |
| TM21 | √ Ta=35°C |
| Lifespan L70 | >54000Hrs |
| Lifespan L80 | >54000Hrs |
| Lifespan L90 | >51000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 69Lm/W |
| Luminous flux | 550(3K)Lm |
| CCT | 3000/4000/5700K |
| CRI | >80 |
| LED manufacturer | Hongli Zhihui |
| Chip type | SMD 2835 |
| Beam angle | 90° |
| Efficiency | 100% |