
צמוד קיר שחור מט ROUND15W IP65 3CCT

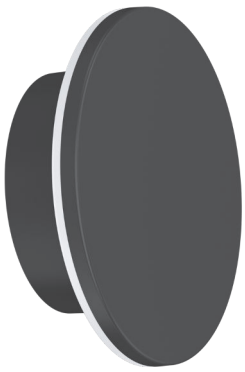


תאורת הילה דקורטיבית מיציקת אלומיניום בגימור שחור מט. צמודי הקיר בדרגת אטימות גבוהה IP65. חסכוניים במיוחד, התקנה קלה ונוחה. להארה ייחודית של היקפי מבנה, משטחים אנכיים, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 76000061

דגם - WL105-15W-P3

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK06
- IP65
- CLASS1
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

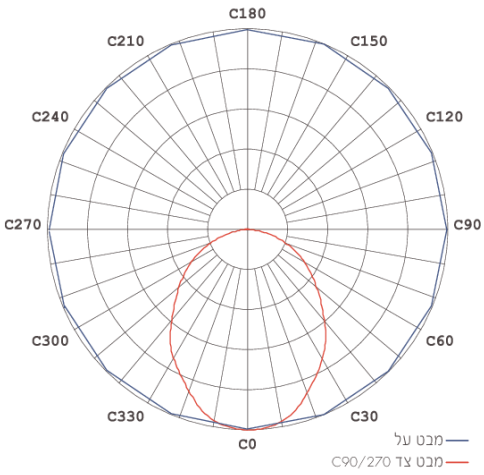



DIMENSIONS & WEIGHT

Height	50mm
Diameter	250mm
Product weight	1000g

MATERIALS & COLORS

Cable surface [mm2]	Black Matt RAL 9005
Protection class IEC 62262	aluminum
Cover finishing	IK06
Cover material	Frosted
Lens material	PC

ELECTRICAL DATA

Nominal wattage	15W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	190mA
Power factor	>0.92
THDi	<25%
Output ripple current	≤0.3%
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK06
Green Building	✓
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-20...+40°C

PERFORMANCE

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>51000Hrs

PHOTOMETRIC DATA

Luminous efficacy	80Lm/W
Luminous flux	1200(3K)Lm
CCT	3000/4000/5700K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	90°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין ,41 המעיין < קבוצת ניסקו בע"מ