

צמוד קיר שחור מט ROUND15W IP65 3CCT

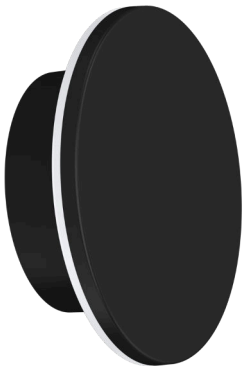

תאורת הילה דקורטיבית מיציקת אלומיניום בגימור שחור מט. צמודי הקיר בדרגת אטימות גבוהה IP65. חסכוניים במיוחד, התקנה קלה ונוחה. להארה ייחודית של היקפי מבנה, משטחים אנכיים, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 76000061
דגם - WL105-15W-P3
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK06 | מתאים לדרישות התקן הישראלי

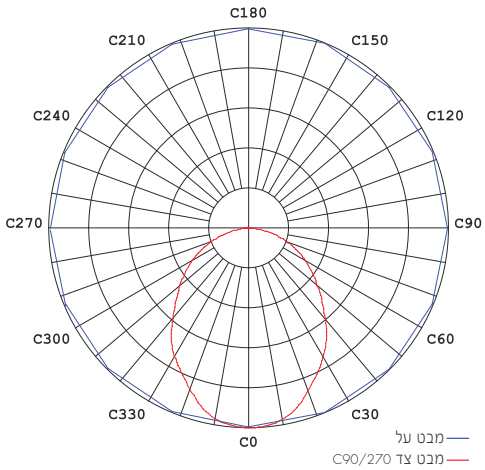



DIMENSIONS & WEIGHT	מידות ומשקל
Height	50mm
Diameter	250mm
Product weight	1000g

MATERIALS & COLORS	מבנה וגימור
Product color	Black Matt RAL 9005
Body material	aluminum
Protection class IEC 62262	IK06
Cover finishing	Frosted
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	15W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	190mA
Power factor	>0.92
THDi	<25%
Output ripple current	≤0.3%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK06
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>51000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	80Lm/W
Luminous flux	1200(3K)Lm
CCT	3000/4000/5700K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	90°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >