צמוד קיר שחור DROP UP / DOWN 8W IP65 3CCT




תאורת חוץ בעיצוב מינימלי ונקי עם אפשרות בחירה להתקנה כלפי מעלה או מטה ויצירת אפקטים של אור והצללה. גוף אלומיניום איכותי בגוון שחור ובדרגת אטימות IP65. התקנה נוחה וקלה בהיקפי מבנה, כניסות, מבואות, חללים גדולים ועוד.


מק"ט - 76000070

דגם - WL91-8W-C3

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS1
- אייקון של 240-220 וולט 60-50 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

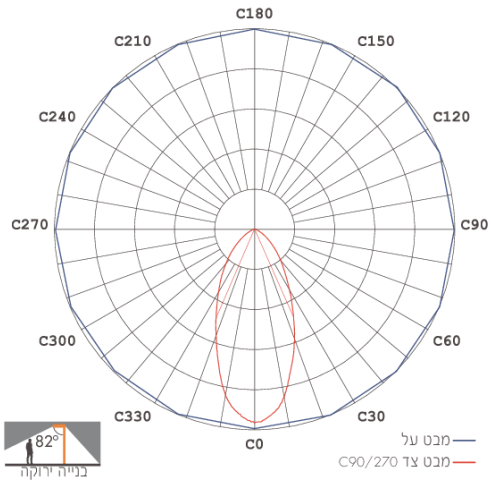





DIMENSIONS & WEIGHT

Width	121mm
Length	202mm
Height	95mm
Product weight	500g

MATERIALS & COLORS

Cable surface [mm2]	Black Matt RAL 9005
Protection class IEC 62262	aluminum
Cover finishing	IK06
Cover material	Frosted

ELECTRICAL DATA

Nominal wattage	8.6W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	105mA
Power factor	>0.92
THDi	<22%
Output ripple current	≤0.5%
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
Flicker IEEE 1789	ɒ
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK06
Green Building	✓
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-20...+40°C

PERFORMANCE

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>44000Hrs

PHOTOMETRIC DATA

Luminous efficacy	87Lm/W
Luminous flux	750(3K)Lm
CCT	3000/4000/5700K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	45°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >