
צמוד קיר שחור DROP UP / DOWN 8W IP65 3CCT




תאורת חוץ בעיצוב מינימלי ונקי עם אפשרות בחירה להתקנה כלפי מעלה או מטה ויצירת אפקטים של אור והצללה. גוף אלומיניום איכותי בגוון שחור ובדרגת אטימות IP65. התקנה נוחה וקלה בהיקפי מבנה, כניסות, מבואות, חללים גדולים ועוד.

מק"ט - 76000070
דגם - WL91-8W-C3
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

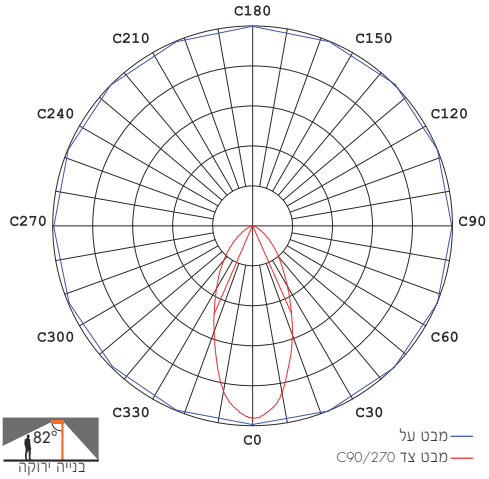





DIMENSIONS & WEIGHT	מידות ומשקל
Width	121mm
Length	202mm
Height	95mm
Product weight	500g

MATERIALS & COLORS	מבנה וגימור
Product color	Black Matt RAL 9005
Body material	aluminum
Protection class IEC 62262	IK06
Cover finishing	Frosted

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	8.6W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	105mA
Power factor	>0.92
THDi	<22%
Output ripple current	≤0.5%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
Flicker IEEE 1789	√
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK06
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>44000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	87Lm/W
Luminous flux	750(3K)Lm
CCT	3000/4000/5700K
CRI	>80
LED manufacturer	Hongli Zhihui
Chip type	SMD 2835
Beam angle	45°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >