
צמוד קיר/תקרה לבן MAGNUM 12W IP65 אור ניטרלי




צמודי קיר/תקרה מקצועיים ודקורטיביים בדרגת אטימות גבוהה IP65. גוף אנטי-וונדלי עשוי פוליקרבונט בדרגת חוזק מכני IK08 ובסיס בכיסוי PC. להארה בשבילים, חומות, מעברים, חדרי מדרגות, חדרי שירות ועוד.

מק"ט - 76244012
דגם - YY-BL-230-ND
קישור לדף מוצר ואביזרים נלווים באתר

מתאים לדרישות התקן הישראלי | IK08 | IP65 | 100-240V 50-60Hz | PRO | 5 YEAR GUARANTEE

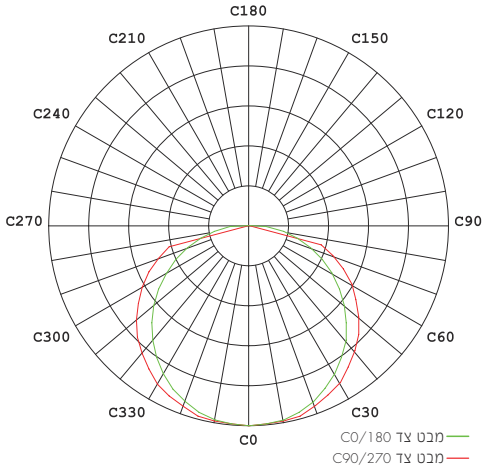



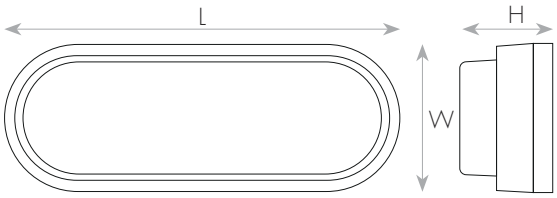

DIMENSIONS & WEIGHT	מידות ומשקל
Width	105mm
Length	230mm
Height	55mm
Product weight	300g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	12W
Nominal current	0.06A
Nominal voltage	100-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	YY-JBD-12W-V0.1
Driver output current	160mA
Power factor	>0.92
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13
Photobiological Safety	IEC 62471 RG0 (Exempt)
LM80	√
TM21	√ Ta=35°C
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4 √ משרד הביטחון

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs
TM21	√ Ta=35°C
Lifespan L80	>36000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	125Lm/W
Luminous flux	1500Lm
CCT	4000K
CRI	>85
LED manufacturer	DACOL
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >