תאורת חירום חד תכליתית על הטיח לבן SPARK GEN2 3W אור ניטרלי



תאורת חירום עגולה חד תכליתית צמודת תקרה, מיועדת להארת נתיבי מילוט על פי תקן 1838 וכוללת יחידת בקרה לבדיקת סוללת LiFePO4, ממיר, מתח טעינה ופריקה. יחידת הבקרה פועלת באופן עצמאי ואוטומטי לחלוטין - שבועית ושנתית. היחידה כוללת חיווי ויזואלי ע"י נורת לד לפעילות ותקלות. בנוסף קיים לחצן טסט לבדיקה ידנית. זמן פעולה בשעת חירום כ־180 דקות. ייעודית לנתיבי מילוט, מסדרונות, בתי מלון, משרדים ומגדלי מגורים.

מק"ט - 77703014

דגם - DLB-0A2-AST-GN2 1.5W

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK06
- IP30
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

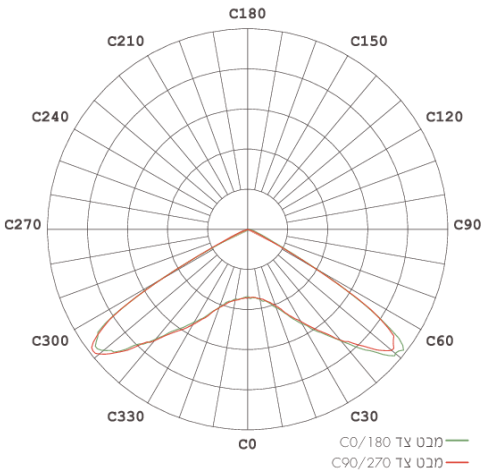

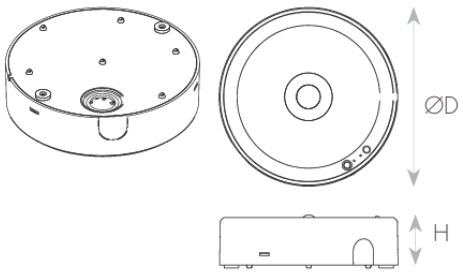

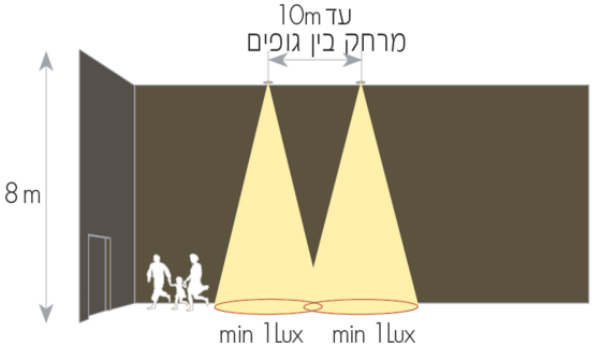

DIMENSIONS & WEIGHT

Height	42.4mm
Diameter	150mm
Product weight	240g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	PC
Cover finishing	IK06
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	1.2W
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	GINKGO
Driver output current	550mA
Battery	LiFePO4
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years Battery 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-1 IEC 60598-2-22:2021 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-13 IEC 62031 IEC 62493 IEC 62133 IEC 62620
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
Protection class IK 62262 (shock resistance)	IK06
ISO 9001	✓
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING

Ambient temperature range	0...+40°C

PERFORMANCE

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA

Luminous flux	230Lm
CCT	4000K
LED manufacturer	SMALITE
Chip type	SMD 5050
Beam angle	125°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ