חד תכליתי לבן על הטיח SKY 2X3W IP54



תאורת חירום חד תכליתית צמודת תקרה בדרגת אטימות IP54. זמן פעולה בשעת חירום - 180 דקות. סוללת ליתיום איכותית, העומדת במספר רב של מחזורי טעינה. יחידת בקרה מובנית לבדיקת סוללה, ממיר, מתח טעינה ופריקה. כוללת יחידת בקרה הפועלת עצמאית בחיווי ויזואלי ע"י נורת לד בחלקו הקדמי של המוצר. באישור מכון התקנים ובהתאמה לדרישות תקנות הבנייה. מיועדת להארת נתיבי מילוט במשרדים, חניונים, מבנה מגורים, מרלוג"ים, מפעלים, אזורי עבודה ומוסדות ציבור.

מק"ט - 77703118
דגם - E639101
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP54 | מתאים לדרישות התקן הישראלי

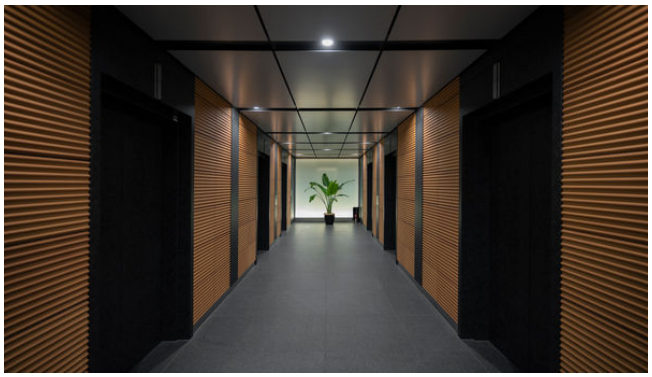

DIMENSIONS & WEIGHT — מידות ומשקל

Height	38.5mm
Diameter	110mm
Product weight	200g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	PC
Cover finishing	Clear
Cover material	PC
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	3W
Battery capacity (Wh)	9.25wh
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Battery	Li-ion
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years Battery 2 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-1 IEC 60598-2-22:2021 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-13 IEC 62031 IEC 62133 IEC 62620
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP54
Ambient temperature range	0...+45°C

PERFORMANCE ביצועים

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA אופטיקה

Luminous flux	250Lm
CCT	6500K
CRI	>75
Chip type	SMD 3535
Beam angle	145°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ