

תאורת חירום חד תכליתית לבן SPACE 5W אור קר



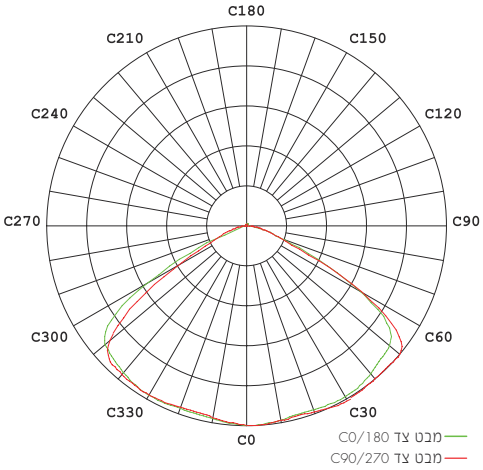



תאורת חירום חד תכליתית צמודת תקרה בדרגת אטימות IP54. זמן פעולה בשעת חירום - 180 דקות. סוללת ליתיום איכותית, העומדת במספר רב של מחזורי טעינה. יחידת בקרה מובנית לבדיקת סוללה, ממיר, מתח טעינה ופריקה. יחידת בקרה הפועלת עצמאית בחיווי ויזואלי ע"י נורת לד בחלקו הקדמי של המוצר. באישור מכון התקנים ובהתאמה לדרישות תקנות הבנייה. מיועדת להארת נתיבי מילוט במשרדים, חניונים, מבנה מגורים, מרלוג"ים, מפעלים, אזורי עבודה ומוסדות ציבור.

מק"ט - 77703125
דגם - Emergency BY-T1405S 5W IP54 IK08
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | IK08 | מתאים לדרישות התקן הישראלי



DIMENSIONS & WEIGHT — מידות ומשקל

Height	42mm
Diameter	140mm
Product weight	300g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PC
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	5/1W
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Battery	Li-ion
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years Battery 2 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-22 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-11 IEC 60335-1 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP54
Ambient temperature range	0...+40°C

PERFORMANCE ביצועים

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA

אופטיקה

Luminous flux	290Lm
CCT	6500K
CRI	>70
LED manufacturer	Lumen Pioneer Opto
Chip type	SMD 3535
Beam angle	140°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >