
תאורת חירום חד תכליתית תחת הטיח לבן
SPACE 3W



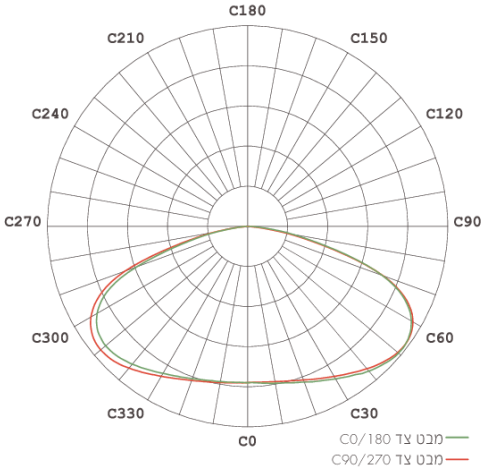

תאורת חירום חד תכליתית שקועת תקרה בדרגת אטימות IP54. זמן פעולה בשעת חירום - 180 דקות. סוללת ליתיום איכותית, העומדת במספר רב של מחזורי טעינה. יחידת בקרה מובנית לבדיקת סוללה, ממיר, מתח טעינה ופריקה. יחידת בקרה הפועלת עצמאית בחיווי ויזואלי ע"י נורת לד בחלקו הקדמי של המוצר. באישור מכון התקנים ובהתאמה לדרישות תקנות הבנייה. מיועדת להארת נתיבי מילוט במשרדים, חניונים, מבנה מגורים, מרלוג"ים, מפעלים, אזורי עבודה ומוסדות ציבור.


מק"ט - 77703127

דגם - Emergency SELENE-3NM-AT-150 3W IP20

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות



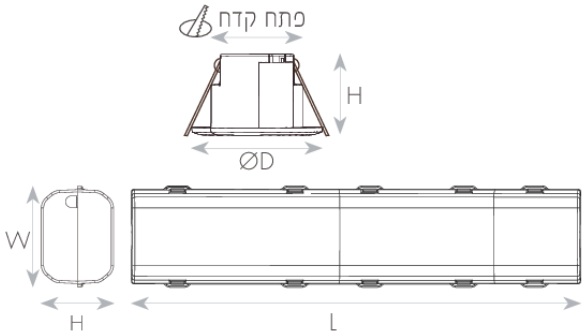

DIMENSIONS & WEIGHT

Height	34mm
Diameter	60mm
Product weight	160g
Cut hole diameter	45mm

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	PC
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	3W
Nominal current	0.02A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	EM B
Driver output current	450mA
Battery	LiFePO4
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years Battery 2 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-2 IEC 60598-2-22 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-11 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA

Luminous efficacy	50Lm/W
Luminous flux	150Lm
CCT	6500K
LED manufacturer	SEOUL SEMICONDUCTOR
Chip type	SMD 3030
Beam angle	150°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >