

תאורת חירום חד תכליתית תחת הטיח לבן
SPACE 3W



תאורת חירום חד תכליתית שקועת תקרה בדרגת אטימות IP54. זמן פעולה בשעת חירום - 180 דקות. סוללת ליתיום איכותית, העומדת במספר רב של מחזורי טעינה. יחידת בקרה מובנית לבדיקת סוללה, ממיר, מתח טעינה ופריקה. יחידת בקרה הפועלת עצמאית בחיווי ויזואלי ע"י נורת לד בחלקו הקדמי של המוצר. באישור מכון התקנים ובהתאמה לדרישות תקנות הבנייה. מיועדת להארת נתיבי מילוט במשרדים, חניונים, מבנה מגורים, מרלוג"ים, מפעלים, אזורי עבודה ומוסדות ציבור.

מק"ט - 77703127
דגם - Emergency SELENE-3NM-AT-150 3W IP20
קישור לדף מוצר ואביזרים נלווים באתר

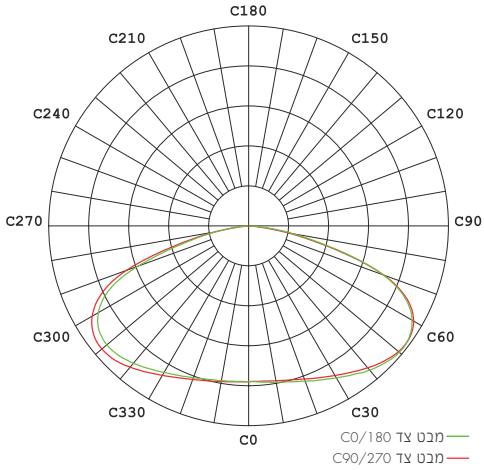

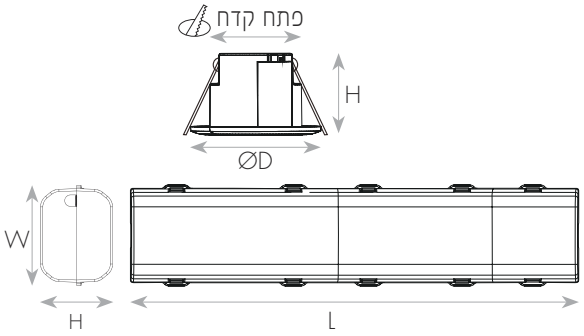



DIMENSIONS & WEIGHT	מידות ומשקל
Height	34mm
Diameter	60mm
Product weight	160g
Cut hole diameter	45mm

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	PC
Cover finishing	Clear
Cover material	PC
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	3W
Nominal current	0.02A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	EM B
Driver output current	450mA
Battery	LiFePO4
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years Battery 2 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-2 IEC 60598-2-22 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-11 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	50Lm/W
Luminous flux	150Lm
CCT	6500K
LED manufacturer	SEOUL SEMICONDUCTOR
Chip type	SMD 3030
Beam angle	150°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ