
צמוד קיר/תקרה אפור MARS 18W IP65 3CCT




גוף תאורה צמוד קיר/תקרה בדרגת אטימות IP65, בעיצוב אלגנטי. גוף התאורה כולל מפסק מובנה לבחירת גוון אור CCT - קר/ניטרלי/חם. מסגרת אלומיניום דקורטיבית, כיסוי אקריל חלבי איכותי להבטחת פיזור אור אחיד ולמניעת סנוור. התקנה נוחה ללא צורך בפתיחת הגוף, חסכוני בצריכת חשמל ובתחזוקה. להארת מרפסות, היקפי מבנה, חדרי מדרגות, פרגולות, מבואות ועוד.

מק"ט - 77703145
דגם - CL300-18-CCT-GRAY
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

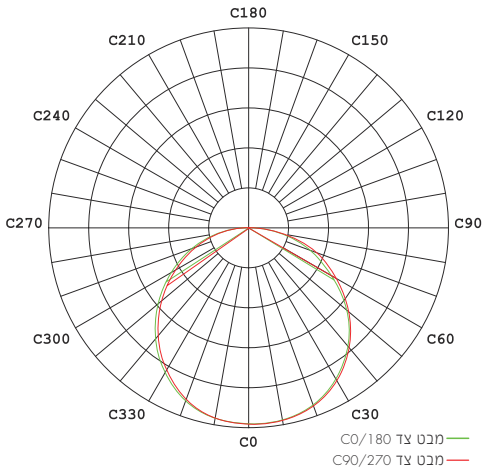



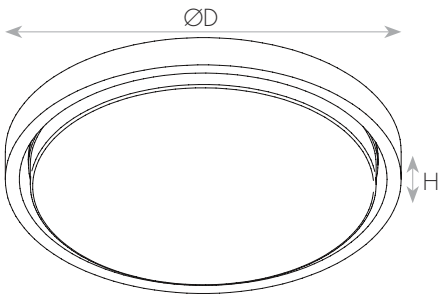

DIMENSIONS & WEIGHT	מידות ומשקל
Height	53.8mm
Diameter	332mm
Product weight	1350g

MATERIALS & COLORS	מבנה וגימור
Product color	gray
Body material	PC and Steel
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	18.8W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver output current	100mA
Power factor	>0.93
THDi	<14%
Output ripple current	≤5%
Inrush current	40A
Inrush current time T_{h50}	250µs
Max. no. of lum. On circuit break. B10 A	50
Max. no. of lum. On circuit break. B16 A	80
Max. no. of lum. On circuit break. C10 A	83
Max. no. of lum. On circuit break. C16 A	133
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
Binning	√ Declaration SDCM ≤ 5
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	√
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP65
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>58000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	141/157/157Lm/W
Luminous flux	2650/2950/2950Lm
CCT	3000/4000/5000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
SDCM	≤5
Beam angle	110°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >