חד תכליתי לבן MULTI 2x3W IP65




יחידת חירום חד תכליתית בדרגת אטימות IP65. מופעלת עם סוללת LiFePO4. להתקנה כשקוע תקרה או צמוד תקרה בעזרת מתאם הכלול בערכה. כולל עדשה נוספת בפוטומטריה א-סימטרית. להארת נתיבי מילוט על פי תקן 1838, ויחידת בקרה לבדיקת סוללה, ממיר, מתח טעינה ופריקה. יחידת הבקרה פועלת באופן עצמאי ואוטומטי, חודשית ושנתית. חיווי ויזואלי ע"י נורת לד לבקרה. זמן פעולה בשעת חירום - כ-120 דקות, ותפוקת אור בחירום כ- 500Lm. ייעודי לנתיבי מילוט, מסדרונות, בתי מלון, משרדים ומגדלי מגורים.

מק"ט - 77703150


דגם - NSDR LiFePO4

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

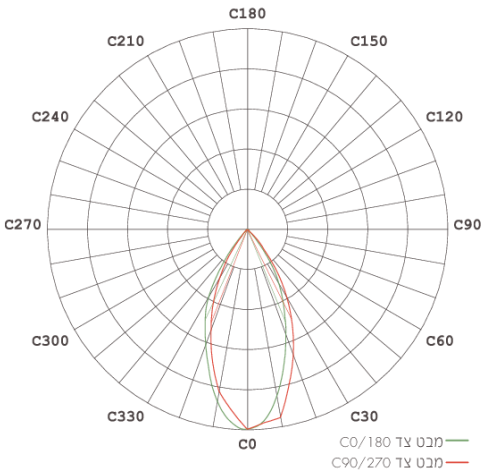



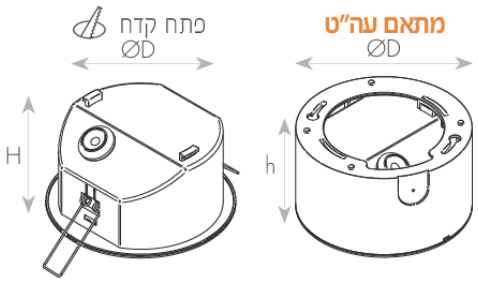

DIMENSIONS & WEIGHT

Height	68mm
Diameter	120mm
Product weight	350g
Cut hole diameter	110mm

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	PC
Cover finishing	IK08
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	2X3W
Nominal current	0.02A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	340mA
Battery	LiFePO4
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years Battery 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-22:2021 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-11 IEC 62031 IEC 62133 IEC 62620
Photobiological Safety	IEC 62471 RG1 IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING

Ambient temperature range	0...+40°C

PERFORMANCE

Working time off-grid (±5%)	120Min

PHOTOMETRIC DATA

Luminous flux	500Lm
CCT	4000K
CRI	>70
LED manufacturer	SMALITE
Chip type	SMD 5050
Beam angle	TYPE 2/45°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >