
חד"ת שקוע/עהט MULTI-M IP65 2X3





יחידת חירום חד תכליתית בדרגת אטימות IP65. מופעלת באמצעות סוללת Ni-MH. להתקנה כשקוע תקרה או צמוד תקרה בעזרת מתאם הכלול בערכה. כולל עדשה נוספת בפוטומטריה א-סימטרית. להארת נתיבי מילוט על פי תקן 1838, ויחידת בקרה לבדיקת סוללה, ממיר, מתח טעינה ופריקה. יחידת הבקרה פועלת באופן עצמאי ואוטומטי, חודשית ושנתית. חיווי ויזואלי ע"י נורת לד לבקרה. זמן פעולה בשעת חירום - כ-120 דקות, ותפוקת אור בחירום כ- 500Lm. ייעודי לנתיבי מילוט, מסדרונות, בתי מלון, משרדים ומגדלי מגורים.

מק"ט - 77703153
דגם - NSDR Ni-MH
קישור לדף מוצר ואביזרים נלווים באתר

מתאים לדרישות התקן הישראלי | IK08 | IP65 | 220-240V 50-60Hz | PRO | 5 YEAR GUARANTEE

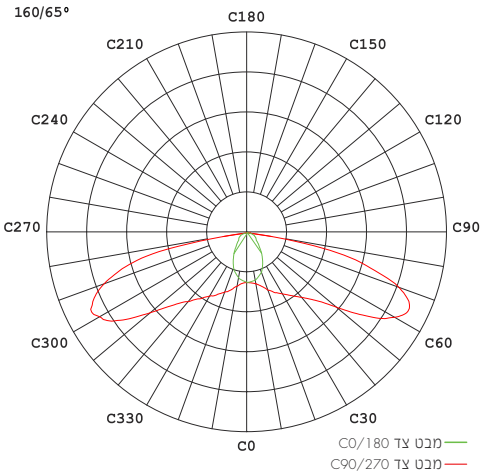

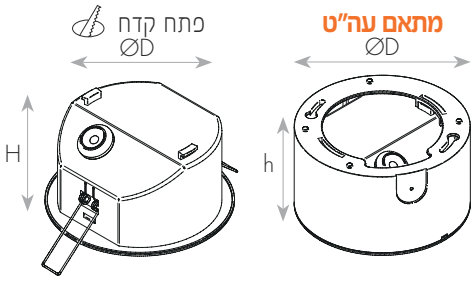

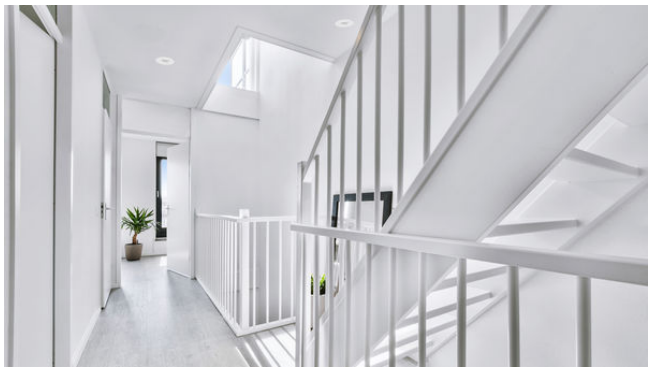

DIMENSIONS & WEIGHT — מידות ומשקל

Height	58mm
Diameter	120mm
Product weight	350g
Cut hole diameter	110mm

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PC
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	3.5W
Battery capacity (Wh)	3.6V 3800mAh
Nominal current	0.02A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	PIOM-NSDR-SC-V0.2
Driver output current	340mA
Battery	Ni-Mh
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years Battery 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-22:2021 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-13 IEC 62031 IEC 61951 IEC 62133
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	recessed/Surface
Mounting location	Ceiling
Type of protection	IP65
Ambient temperature range	0...+40°C

PERFORMANCE ביצועים

Working time off-grid (±5%)	120Min

PHOTOMETRIC DATA אופטיקה

Luminous flux	500Lm
CCT	4000K
CRI	>70
LED manufacturer	SMALITE
Chip type	SMD 2835
Beam angle	45 / 160/65°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >