

צמוד קיר/תקרה דו תכליתי לבן CLICK
30W IP65 3CCT

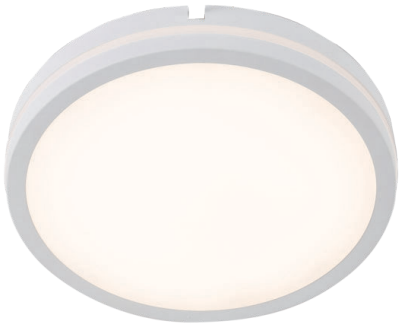

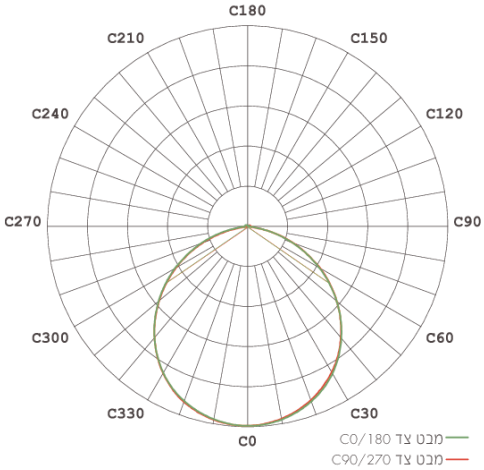

גוף דו תכליתי בדרגת אטימות IP65 ובעיצוב אלגנטי. התקנה קלה ופשוטה ב"קליק". כיסוי חלבי להבטחת פיזור אור אחיד ולמניעת סנוור. עוצמת אור גבוהה בשגרה ובחירום (מעל ל-300Lm). חיווט נוח ללא צורך בפתיחת הגוף. כולל מנגנון חירום הנדלק אוטומטית בעת הפסקת חשמל לפרק זמן של 3 שעות. הגוף מצויד בסוללת ליתיום איכותית, נורית חיווי וכפתור טסט לבדיקת מעגל החירום. ניתן לבחור גוון הארה (חם/ניטרלי/קר). חסכוני בצריכת חשמל ובתחזוקה. ייעודי להארת חדרים, חדרי מדרגות, נתיבי מילוט ועוד.

מק"ט - 77703170

דגם - XF-XX280SUR30180M

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP65
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות



DIMENSIONS & WEIGHT

Height	50mm
Diameter	280mm
Product weight	800g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	PC
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	30/3W
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.60
Battery	LiFePO4
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years Battery 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-1 IEC 60598-2-22:2021 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-13 IEC 62031 IEC 62133 IEC 62620
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65

APPLICATION & MOUNTING

Ambient temperature range	0...+45°C

PERFORMANCE

Lifespan (Hr)	36000Hrs
Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA

Luminous efficacy	100Lm/W
Luminous flux	3000/420(EM)Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ