גוף תאורה ליציאת חירום לבן XT



גוף תאורה דו תכליתי ליציאת חירום. ייעודי להתקנה נוחה כצמוד קיר או בתקרה. מתאים לשילוט חד ודו צדדי. כולל לחצן בדיקה ונורית ביקורת. משך פעולה בחירום: 180 דקות, מגיע עם סוללה נטענת איכותית הניתנת להחלפה בקלות. שילוט במגוון אפשרויות הכוונה. גובה אות: 15 ס"מ, עומד בדרישות תקנות הבנייה 1838. הערכה כוללת שקף "יציאה" מותקן ו - 2 שקפים: "יציאה ימינה", "יציאה שמאלה".


מק"ט - 77822200

דגם - E637695

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות



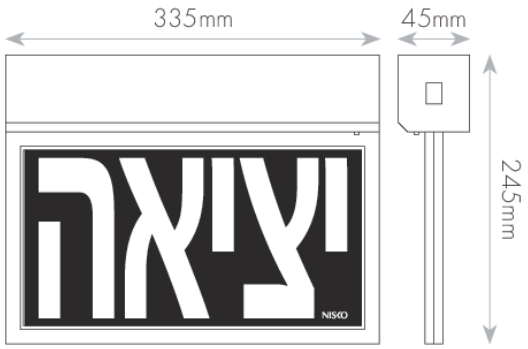

DIMENSIONS & WEIGHT

Width	45mm
Length	335mm
Height	245mm
Product weight	840g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	PC
Lens material	PC

ELECTRICAL DATA

Nominal wattage	3.5W
Nominal current	0.03A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	330mA
Battery	Ni-Mh
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years Battery 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-1 IEC 60598-2-22 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING

Ambient temperature range	0...+30°C

PERFORMANCE

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA

CCT	6000K
LED manufacturer	DACOL
Chip type	SMD 2835
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ