
שלט יציאה לבן TRAFFIC



שלט יציאת חירום דו תכליתי המתאים לשילוט חד ודו צדדי. כולל שני מעגלי לד נפרדים לשגרה ולחירום. השלט מצויד בבדיקה אוטומטית הכוללת בדיקת תקינות למעגל החירום אחת לשבוע, ובנוסף, כולל בדיקת תקינות שנתית, פריקה וטעינה של הסוללה. התקנה קלה ונוחה כצמוד קיר/תקרה. מתאים לדרישות התקן הישראלי ובהתאמה לדרישות תקנות הבנייה. זמן פעולה בחירום: 180 דקות. ניתן להזמין שילוט עם גובה אות 20 ס"מ או 24 ס"מ. מיועד להתקנה בחניונים, מרחבים גדולים ועוד.

מק"ט - 77855600
דגם - ESLA-50-D
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

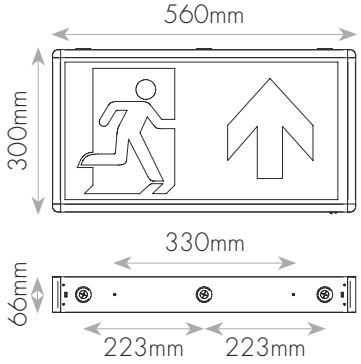

DIMENSIONS & WEIGHT	מידות ומשקל
Width	66mm
Length	560mm
Height	300mm

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover material	PC
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	8W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	200mA
Dimmable driver mode	No
Power factor	>0.82
THDi	<32%
Battery	Li-ion

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years Battery 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-22
CB	IEC 60598-1 IEC 60598-2-1 IEC 60598-2-22 IEC 61347-1 IEC 61347-2-7 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface/Pendant
Mounting location	Ceiling Wall
Type of protection	IP20
Ambient temperature range	0...+40°C

PERFORMANCE ביצועים

Working time off-grid (±5%)	180Min

PHOTOMETRIC DATA אופטיקה

CCT	6000K
LED manufacturer	Fujian Lightning
Chip type	SMD 3030
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ