
# שקוע תקרה לבן 36° 10W GRADO 6 אור חם




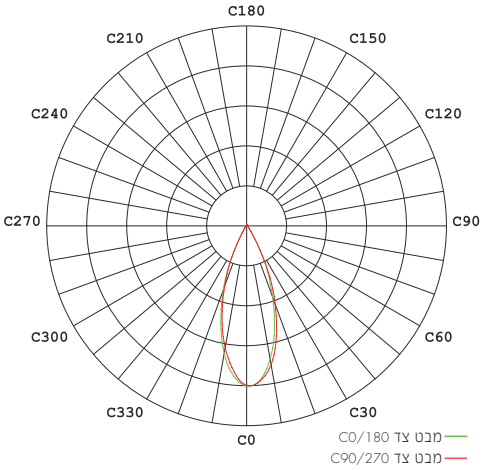


סדרת שקועי תקרה GRADO בעיצוב יוקרתי במגוון הספקים ואורכים. כוללת יעילות אורית גבוהה, תאורה איכותית, מדויקת ונטולת סנוור. להארת בתי מגורים, גלריות, אירוח, מעברים ועוד.

מק"ט - 75410551
דגם - UNI-GRS-10W3
קישור לדף מוצר ואביזרים נלווים באתר

מתאים לדרישות התקן הישראלי | IK04 | IP40 | 100-240V 50-60Hz | VALUE | 3 YEAR GUARANTEE

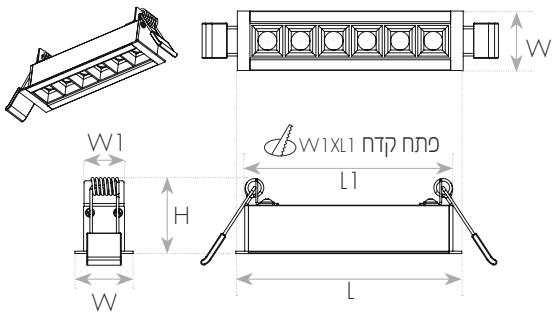




## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Width | 32.5mm |
| Length | 122.5mm |
| Height | 45mm |
| Cut hole width | 23mm |
| Product weight | 180g |
| Cut hole length | 112.5mm |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | white |
| Body material | aluminum |
| Protection class IEC 62262 | IK04 |
| Cover finishing | Prismatic |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 10W |
| Nominal current | 0.05A |
| Nominal voltage | 100-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | External LED driver |
| Driver output current | 200mA |
| Power factor | >0.90 |
| Output ripple current | ≤2% |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-2 |
| CE | IEC 60598-1<br>IEC 60598-2-2<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP40 |
| Protection class IK 62262 (shock resistance) | IK04 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Recessed |
| Mounting location | Ceiling |
| Type of protection | IP40 |
| Ambient temperature range | 0...+35°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

## PHOTOMETRIC DATA

## אופטיקה

| | |
|---|---|
| Luminous efficacy | 80Lm/W |
| Luminous flux | 800Lm |
| CCT | 3000K |
| CRI | >90 |
| LED manufacturer | LUMILEDS |
| Chip type | SMD 3030 |
| Beam angle | 36° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >