צמוד קיר בזלת LOTUS-S 2W IP65 3CCT



סדרת גופי תאורת לד צמודי קיר בדרגת אטימות IP65. עיצוב דק, חדיש וקומפקטי. כולל שיטה ייחודית לבחירת גוון אור על ידי לחיצת כפתור. חסכוני בצריכת חשמל ותחזוקה. להתקנה על חומות, מעברים, כניסות לחניונים ועוד.

מק"ט - 71461241

דגם - 2006-2W DARK GRAY

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP65
- CLASS2
- אייקון של 240-220 וולט 60-50 הרץ
- מוצר בדרגת VALUE
- שנתיים אחריות

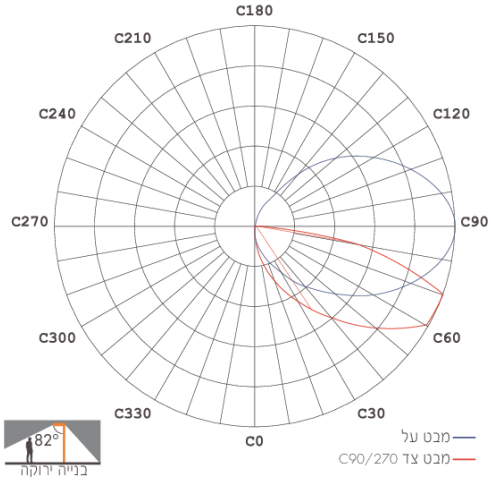

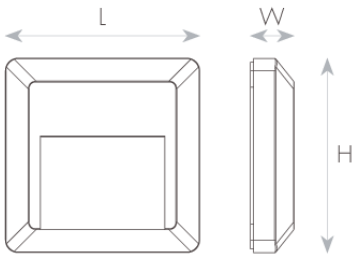



DIMENSIONS & WEIGHT

Width	125mm
Length	28mm
Height	125mm
Product weight	200g

MATERIALS & COLORS

Cable surface [mm2]	gray
Protection class IEC 62262	PC
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	1.9W
Nominal current	0.01A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-20...+40°C

PERFORMANCE

Lifespan (Hr)	15000Hrs

PHOTOMETRIC DATA

Luminous efficacy	26Lm/W
Luminous flux	50/50/50Lm
CCT	3000/4000/6500K
CRI	>80
LED manufacturer	GLORY SKY
Chip type	SMD 2835
Beam angle	82°
Efficiency	100%