
שקוע תקרה מתכוונן לבן PORT 10W אור ניטרלי




שקוע תקרה מתכוונן DARKLIGHT משלב בין עיצוב ייחודי ריבועי ויכולת תאורה מתקדמת. מאפשר ליצור משחקים של אור וצל בחלל. מצוייד ברפלקטור אלומיניום התורם לנצילות אורית גבוהה. זווית הארה מדויקת 36° מונעת סנוור ודרייבר חיצוני ללא ריצוד להתקנה קלה ואמינה. להארת מסדרונות, חדרי מגורים, מסעדות, משרדים, גלריות, בתי מלון ועוד.

מק"ט - 72104036
דגם - FR1008W 10W 4000K 36°
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

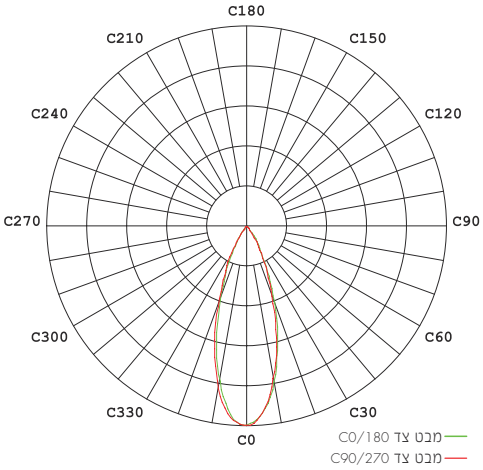

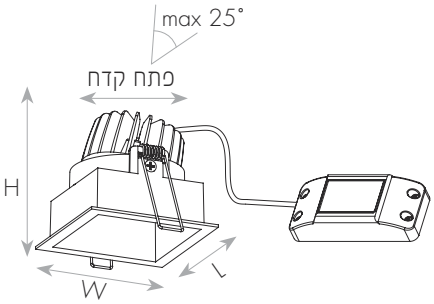



DIMENSIONS & WEIGHT	מידות ומשקל
Width	90mm
Length	90mm
Height	77mm
Cut hole width	83mm
Product weight	328g
Cut hole length	83mm

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	Clear
Cover material	PMMA

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	10W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIR013YS0250H
Driver output current	250mA
Power factor	>0.55
Output ripple current	≤0.5%
Inrush current	9A
Inrush current time T_{h50}	120µs
Max. no. of lum. On circuit break. B10 A	30
Max. no. of lum. On circuit break. B16 A	50
Max. no. of lum. On circuit break. C10 A	60
Max. no. of lum. On circuit break. C16 A	90
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900100
Optional driver 1-10V	LF 17900216 LF 17900217
Optional driver DALI	LF 17900250 LF 17900251
Optional driver TRIAC	LF 17900031 LF 17900032

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	IS 20-1 IS 20-2-2
LM80	√
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	45000Hrs
Driver lifespan	45000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	115Lm/W
Luminous flux	1150Lm
CCT	4000K
CRI	>83
LED manufacturer	Bridgelux
Chip type	COB
Beam angle	36°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ