
שקוע תקרה לבן 36° GRADO 24 25W אור חם




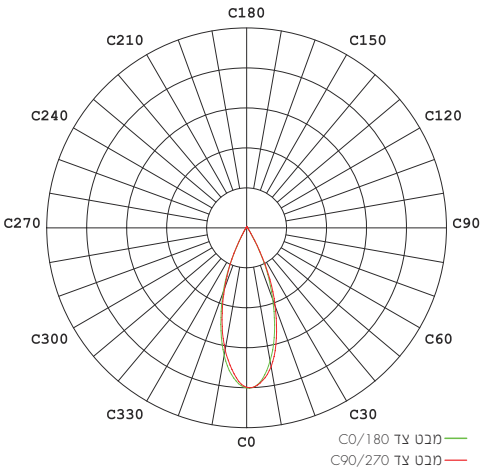

סדרת שקועי תקרה Trimless GRADO בעיצוב יוקרתי במגוון הספקים ואורכים. כוללת יעילות אורית גבוהה, תאורה איכותית, מדויקת ונטולת סנוור. להארת בתי מגורים, גלריות, אירוח, מעברים ועוד.

מק"ט - 75410563
דגם - UNI-GRL-25W3
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 100-240V 50-60Hz | IP40 | IK04 | מתאים לדרישות התקן הישראלי

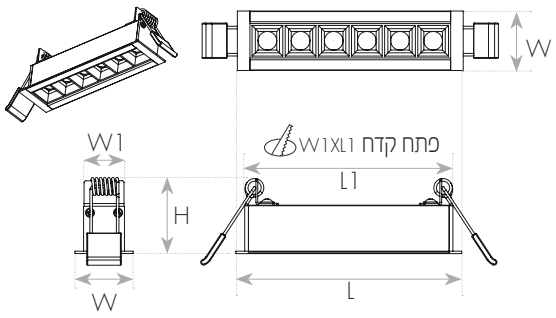



DIMENSIONS & WEIGHT — מידות ומשקל

Width	32.5mm
Length	445mm
Height	45mm
Cut hole width	23mm
Product weight	650g
Cut hole length	435mm

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	Prismatic

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	25W
Nominal current	0.12A
Nominal voltage	100-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver output current	480mA
Power factor	>0.90
Output ripple current	≤2%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CE	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	96Lm/W
Luminous flux	2400Lm
CCT	3000K
CRI	>90
LED manufacturer	LUMILEDS
Chip type	SMD 3030
Beam angle	36°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >